

LOGO & DATE CODE

NOTES:

1.MATERIAL:

HOUSING:THERMOPLASTIC HIGH TEMP WITH 30%G/F UL94 V-0

COLOR:BLACK

ESATA CONTACT:BRASS

USB CONTACT:PHOSPHOR BRONZE

SHELL:PHOSPHOR BRONZE

2.FINISH:




CONTACT:GOLD PLATING ON CONTACT AREA

100u" MIN.TIN PLATING ON SOLDERTAILS

50u" MIN.NICKEL UNDERPLATING OVER ALL


SHELL:50u" MIN.NICKEL UNDERPLATING OVER ALL

注: 带★为重点管控尺寸

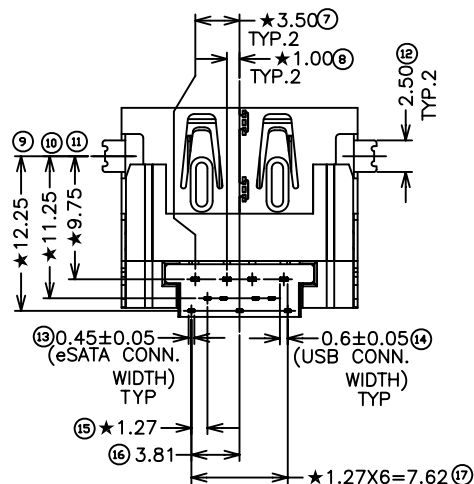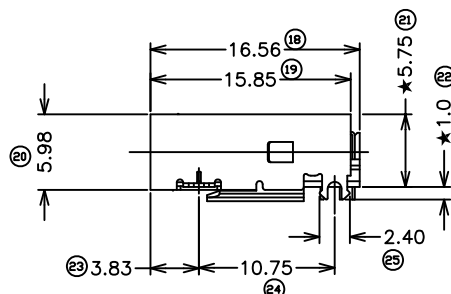

PIN DEFINITION

USB		ESATA	
NAME	TYPE	NAME	TYPE
P1	VBUS	P5	GND
P2	D-	P6	A+
P3	D+	P7	A-
P4	GND	P8	GND
		P9	B-
		P10	B+
		P11	GND

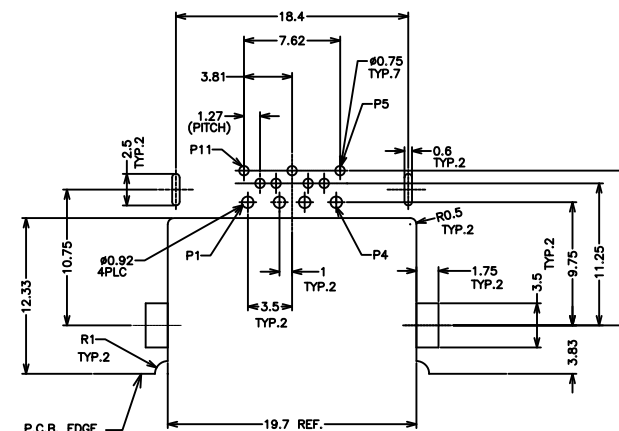

RECOMMEND P.C.BOARD LAYOUT T=1.20mm
PCB TOLERANCE:±0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

ESATAP-PREZ-074A-LF

SERIES

CLIP

EAR

DIP 90°

MALE

LEADFREE

07 TO 4 PIN A TYPE

DESCRIPTION: