





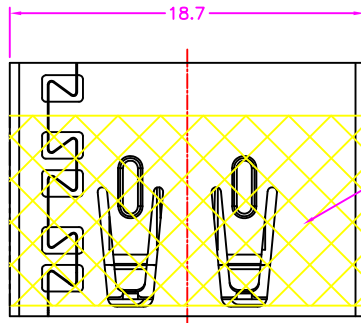


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)

SHELL: STAINLESS STEEL, NICKEL PLATING

TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

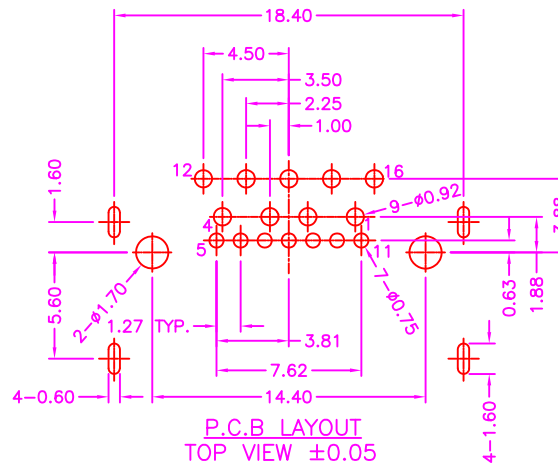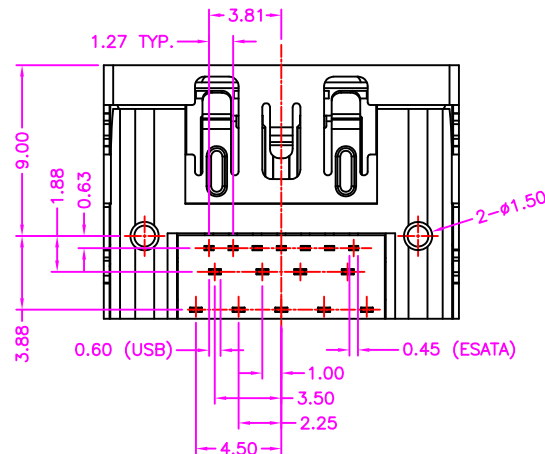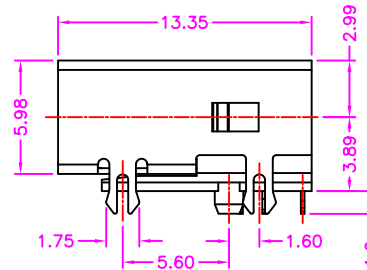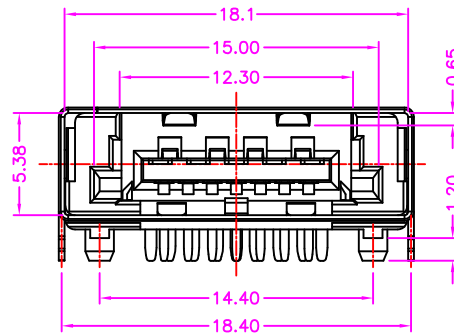

P.C.B. LAYOUT
TOP VIEW ± 0.05

PIN DEFINITION

USB 2.0	
NAME	TYPE
P1	VBUS
P2	D-
P3	D+
P4	GND

USB 3.0	
NAME	TYPE
P12	SSRX-
P13	SSRX+
P14	GND
P15	SSTX-
P16	SSTX+

ESATA	
NAME	TYPE
P5	GND
P6	A+
P7	A-
P8	GND
P9	B-
P10	B+
P11	GND

RoHS Compliant

TOLERANCES ARE

X. ± 0.40
X. ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm$

照片框

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PPROJECTION

ORDER INFORMATION

ESATAP-PRZZPC-9A07-LF

SERIES
MALE
CLIP
DIP 90°
LEADFREE
9 PIN A TYPE TO 07 WAY
MYLAR
POST

DESCRIPTION: COMBO 7PIN E-SATA + 9PIN USB 3.0, PCB MOUNT REVERSE TYPE, R/A
METAL SHIELD, WITH POST & BOARDLOCK, FEMALE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com