


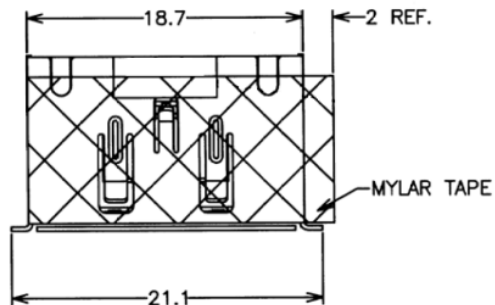

NOTES:

1.MATERIAL:

HOUSING:THERMOPLASTIC HIGH TEMP WITH 30%G/F UL94 V-0

COLOR:BLACK

ESATA CONTACT:BRASS

USB CONTACT:PHOSPHOR BRONZE

SHELL:PHOSPHOR BRONZE




2.FINISH:

CONTACT:GOLD PLATING ON CONTACT AREA


100u" MIN.TIN PLATING ON SOLDER TAILS

50u" MIN.NICKEL UNDERPLATING OVER ALL

SHELL:50u" MIN.NICKEL UNDERPLATING OVER ALL

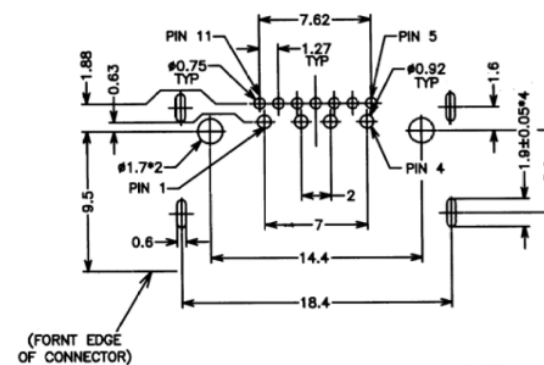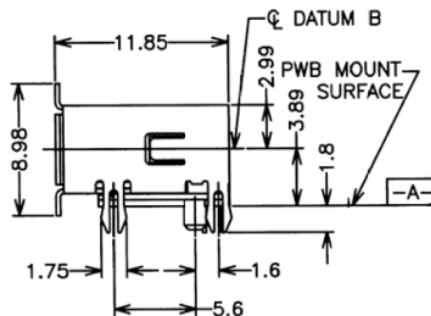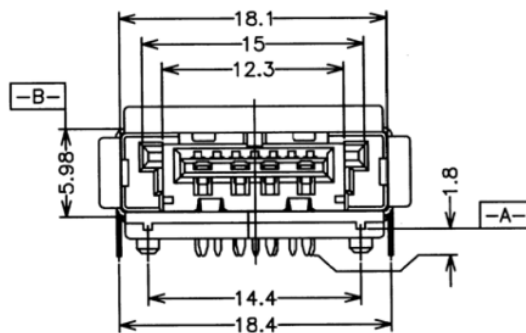

RECOMMEND P.C BOARD LAYOUT
PCB TOLERANCE:±0.05

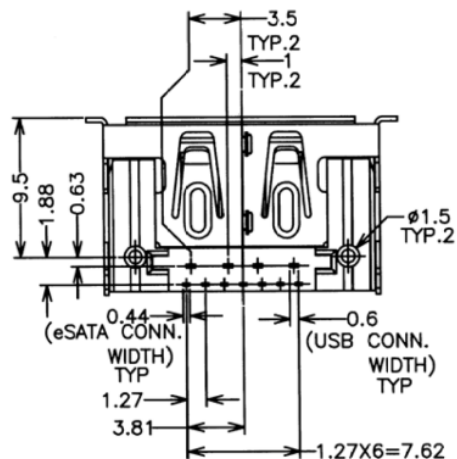

PIN DEFINITION

USB		ESATA	
NAME	TYPE	NAME	TYPE
P1	VBUS	P5	GND
P2	D-	P6	A+
P3	D+	P7	A-
P4	GND	P8	GND
		P9	B-
		P10	B+
		P11	GND

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

照片框

ORDER INFORMATION

ESATAP-PRZZPCR-074A-LF


SERIES

MALE
DIP 90°

REEL
MYLAR
POST
CLIP


LEADFREE
07 TO 4 PIN A TYPE

DESCRIPTION:


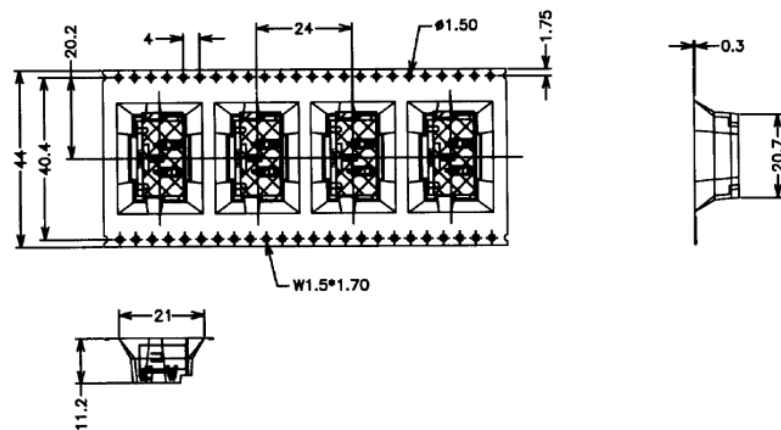


NOTE:

1. PEELING SPEED: 300mm/MINUTE
2. PEELING RESISTANCE: 20g~130g
3. PEELING ANGLE: 165° ~ 180°
4. DIMENSION:
INNER CARTON: L=345, W=345, H=415
5. QUANTITY:
250 PCS/REEL
8 PCS REEL/SHIPPING CARTON
2000 PCS/SHIPPING CARTON



AROUND THE OUTER PERIPHERY IN A TURE.
WEEDING THE COVER TAPE.

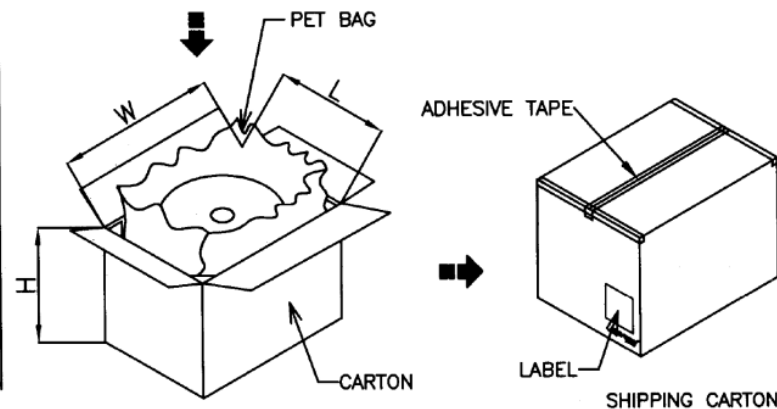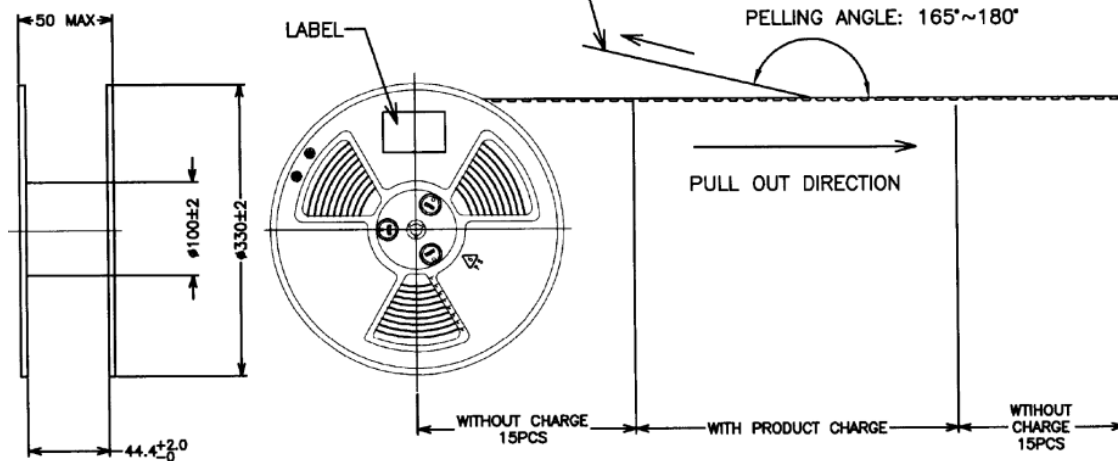

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ESATAP-PRZZPCR-074A-LF

SERIES

MALE
DIP 90°

REEL

MYLAR

POST

CLIP

LEADFREE

07 TO 4 PIN A TYPE

DESCRIPTION: