




NOTES:

1.MATERIAL:

HOUSING:THERMOPLASTIC HIGH TEMP WITH 30%G/F UL94 V-0

COLOR:BLACK

ESATA CONTACT:BRASS

USB CONTACT:PHOSPHOR BRONZE

SHELL:PHOSPHOR BRONZE




2.FINISH:

CONTACT:GOLD PLATING ON CONTACT AREA


100u" MIN.TIN PLATING ON SOLDER TAILS

50u" MIN.NICKEL UNDERPLATING OVER ALL

SHELL:50u" MIN.NICKEL UNDERPLATING OVER ALL

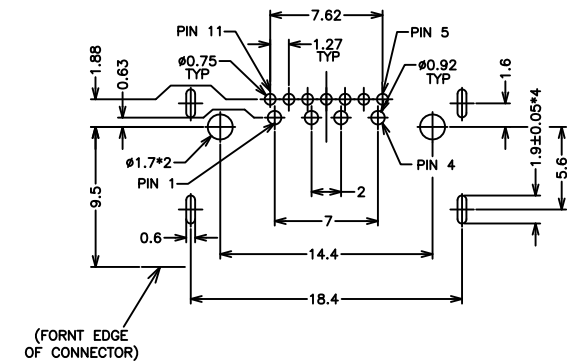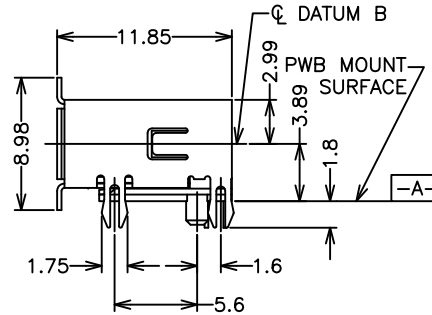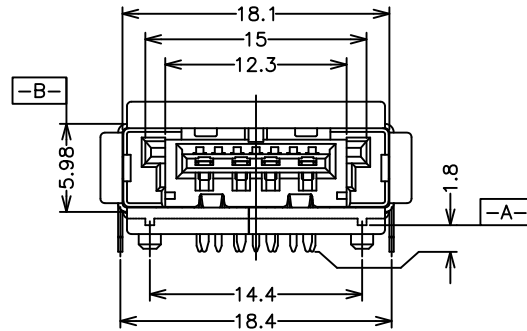

RECOMMEND P.C.BOARD LAYOUT
PCB TOLERANCE:±0.05

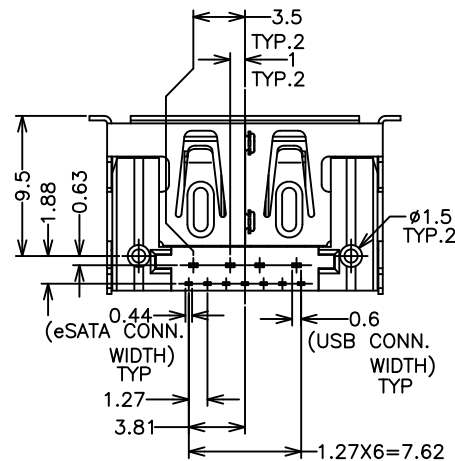

PIN DEFINITION

USB	
NAME	TYPE
P1	VBUS
P2	D-
P3	D+
P4	GND

ESATA	
NAME	TYPE
P5	GND
P6	A+
P7	A-
P8	GND
P9	B-
P10	B+
P11	GND

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ± 3°

照片框

ORDER INFORMATION

ESATAP-PRZZPR-074A-LF

SERIES

LEADFREE

07 TO 4 PIN A TYPE

MALE


CLIP

DIP 90°

REEL


POST

DESCRIPTION: ESATA 7P + USB 4P 2 IN 1 R/A, STD, DIP, TYPE.


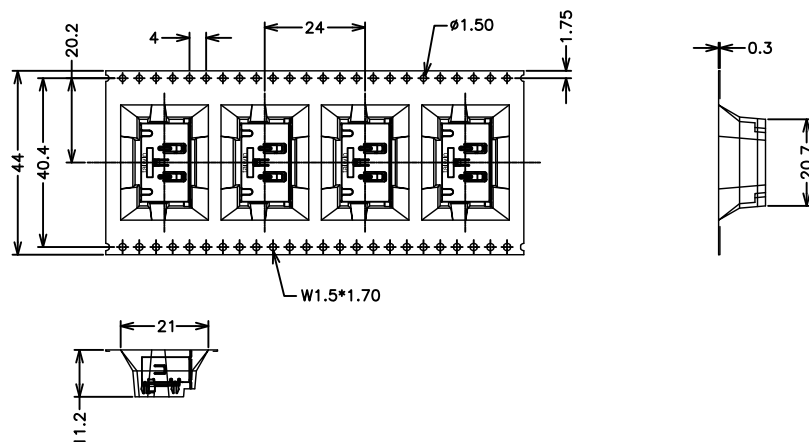


NOTE:

1. PEELING SPEED: 300mm/MINUTE
2. PEELING RESISTANCE: 20g~130g
3. PEELING ANGLE: 165° ~ 180°
4. DIMENSION:
INNER CARTON: L=345, W=345, H=415
5. QUANTITY:
250 PCS/REEL
8 PCS REEL/SHIPPING CARTON
2000 PCS/SHIPPING CARTON



AROUND THE OUTER PERIPHERY IN A TURE.
WEEDING THE COVER TAPE.

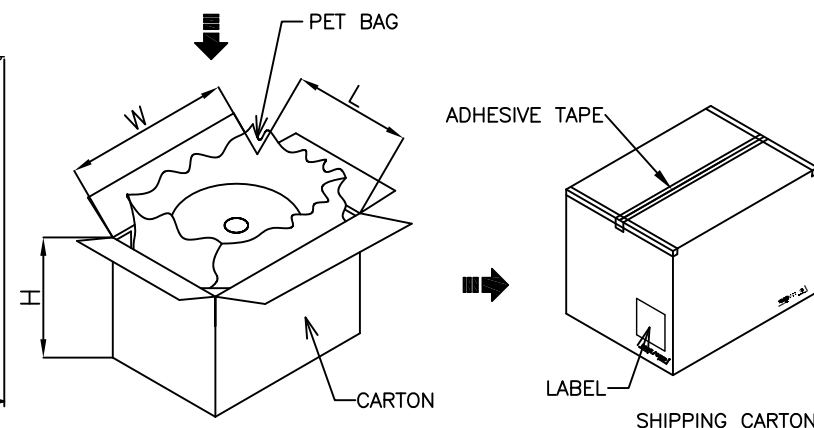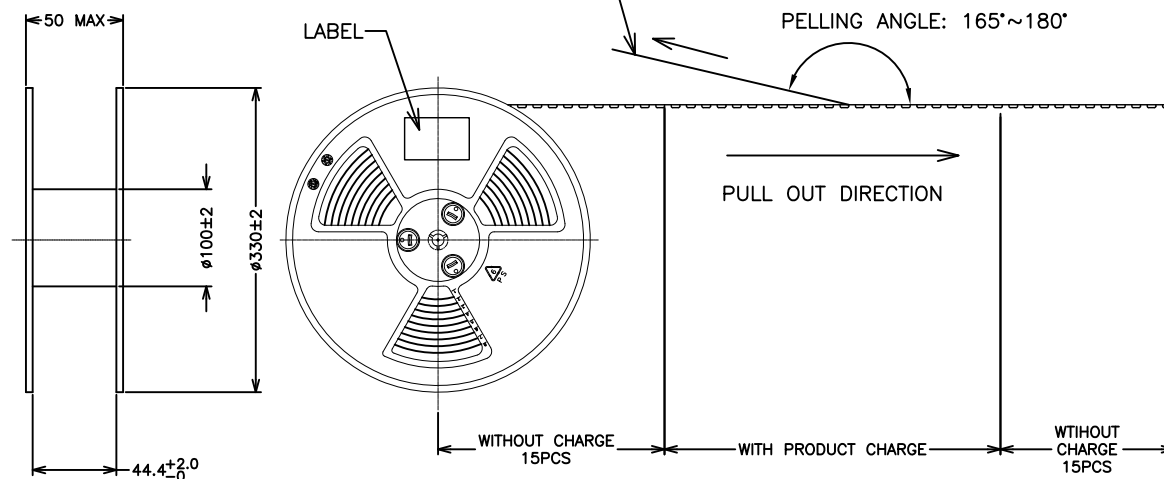

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

ESATAP-PRZZPR-074A-LF

SERIES

MALE

CLIP

POST

DIP 90°

LEADFREE

07 TO 4 PIN A TYPE

REEL

POST

DIP 90°

DESCRIPTION: ESATA 7P + USB 4P 2 IN 1 R/A, STD, DIP, TYPE.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ± 3°