
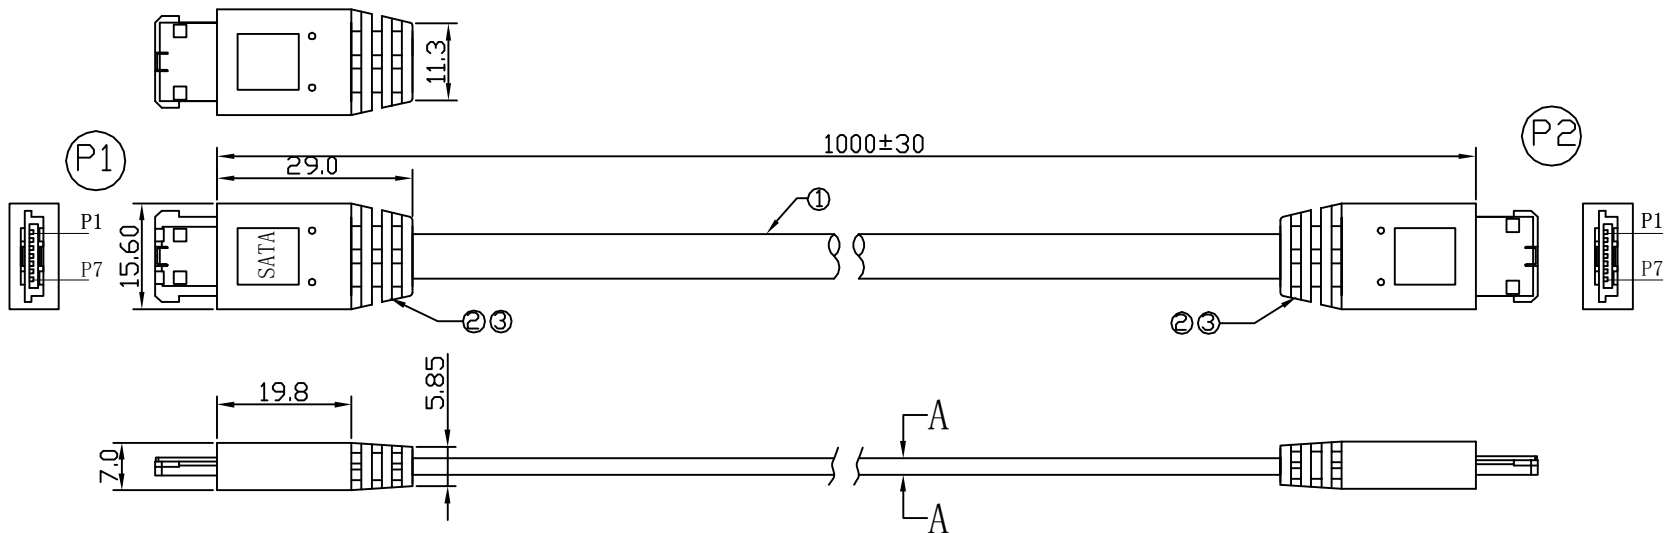
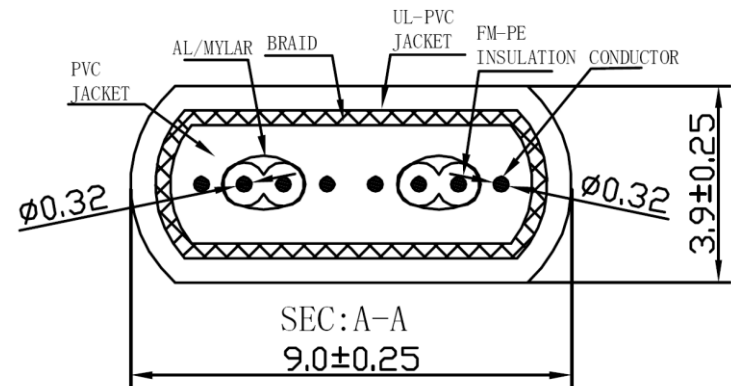


ELECTRONIC TEST CONDITION:
100% OPEN SHORT & MISWIRE TEST.
CONDCTIVE RESISTANCE:5Ω/MAX
INSULATION RESISTANCE:10MΩ/MIN. AT DC 300V

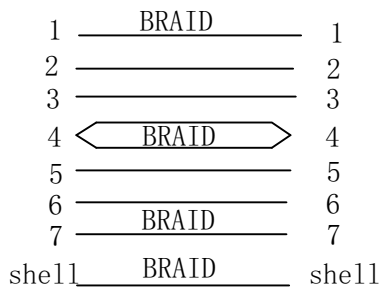

3	PVC:45P BLACK		Kg/1K
2	E-SATA 7P/F INSULATOR BLACK , PIN GOLD FLASH , IMPACT TYPE	2	SET
1	UL20276 26AWG 8PIN BLACK-PVC JACKET 96铜包钢编织 L=1M	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

ESAX2-070726-F1M-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. ESAX2-070726-F1M		RoHS Compliant						
DWG NO. ESAX2-070726-F1M		CHECKED BY CY	TOLERANCES ARE X. ± .X ± .XX ± .XXX ± ANG	DESCRIPTION:				
FILE NO.		DRAWING BY						
UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS		DATE	