

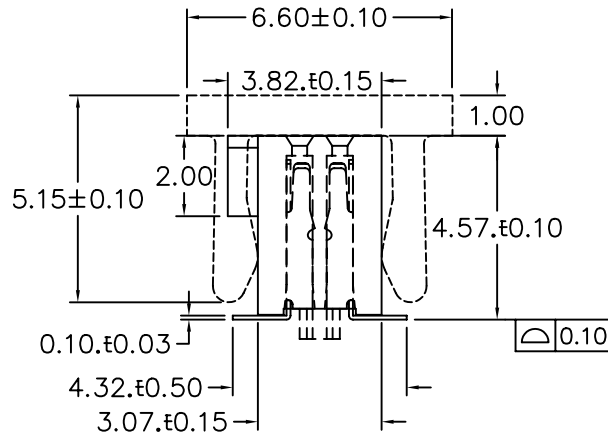
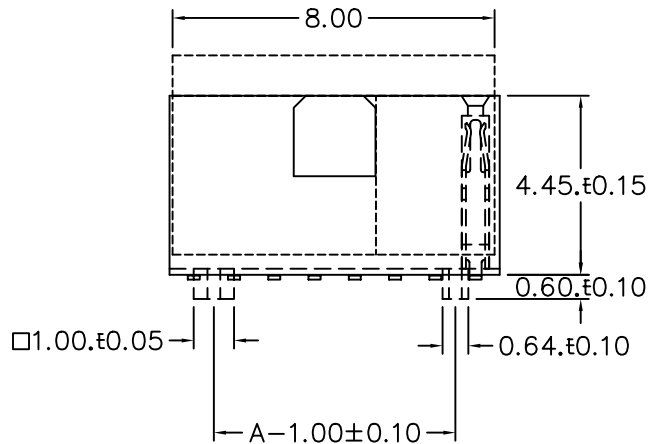


No. of Contacts	DIMENSIONS	
	A	B
6	2.00	3.20
8	3.00	4.20
10	4.00	5.20
12	5.00	6.20
14	6.00	7.20
16	7.00	8.20
18	8.00	9.20
20	9.00	10.20
22	10.00	11.20
24	11.00	12.20
26	12.00	13.20
28	13.00	14.20
30	14.00	15.20
32	15.00	16.20
34	16.00	17.20
36	17.00	18.20
38	18.00	19.20
40	19.00	20.20
42	20.00	21.20
44	21.00	22.20
46	22.00	23.20
48	23.00	24.20
50	24.00	25.20
52	25.00	26.20
54	26.00	27.20
56	27.00	28.20
58	28.00	29.20
60	29.00	30.20
62	30.00	31.20
64	31.00	32.20

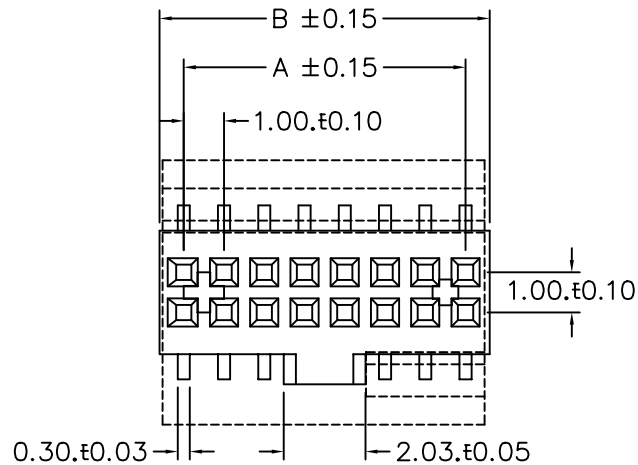

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

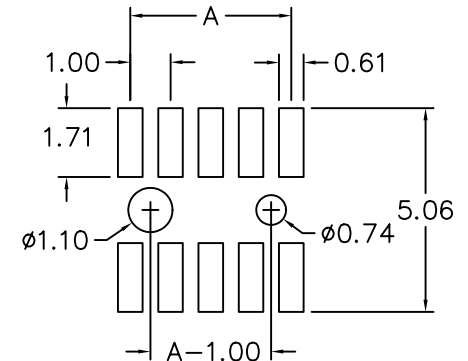

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Phosphor Bronze.
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 (Nylon-6T)
 Color: Black
 Finish: Gold plated
 ◎ Standard: Gold flash all over

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫有限公司

PART NO. F-10K-VPC-2Xxx

DWG NO. F-10K-VPC-2Xxx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.25
 .XX ± 0.20
 .XXX $\pm$
 AWG

DESCRIP TION:

1.0X1.0mm SMD SOCKET

AREA

REVISIONS

HK

DATE