

#### Specifications

Current Rating:3Amp

Insulation Resistance:1000M $\Omega$ Min.

Dielectric Withstanding Voltage:600VAC

Contact Resistance:20m $\Omega$ Max.



Operating Temperature:-40°C to +105°C

Materials


Contact Material:Phosphor Bronze

Insulator Material:High Temperature

Thermoplastic, UL 94V-0 Nylon 6T(Halogen Free)  
or the equivalent material

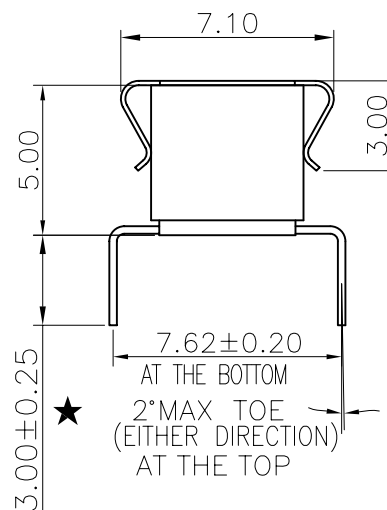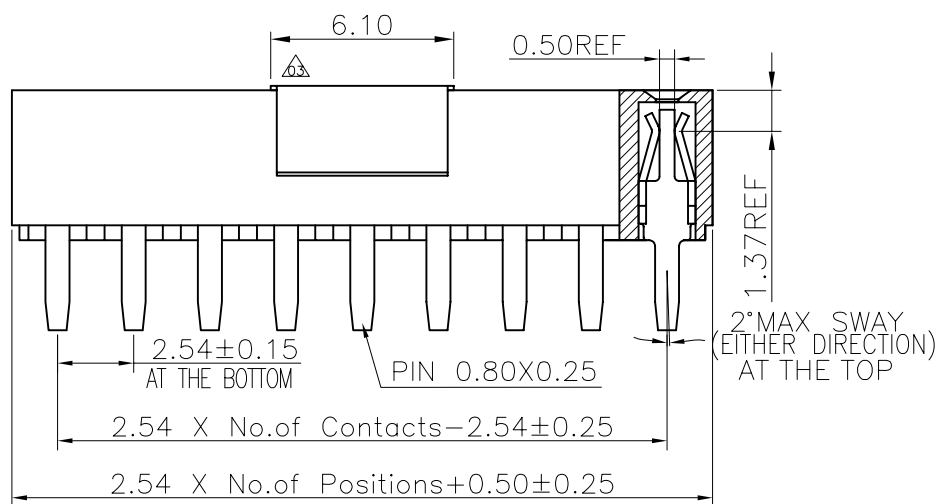

Recommended P.C.Board  
Hole Layout  
(Tolerance: $\pm$ 0.05)

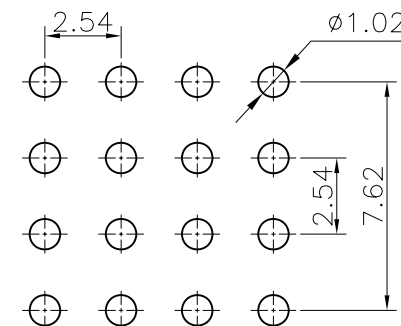

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X.  $\pm$  0.30  
.X  $\pm$  0.25  
.XX  $\pm$  0.15  
.XXX  $\pm$  0.10  
ANG  $\pm$

PPOJECTION

照片框

ORDER INFORMATION

F-B76C-2Xxx-LF  
SERIES  
LEADFREE  
2X02:04WAY  
2X40:80WAY  
CAP  
BOTTOM ENTRY 7.62mm

DESCRIPTION: 2.54 FEMALE HEADER DUAL ROWS DIP TYPE CONNECTOR