


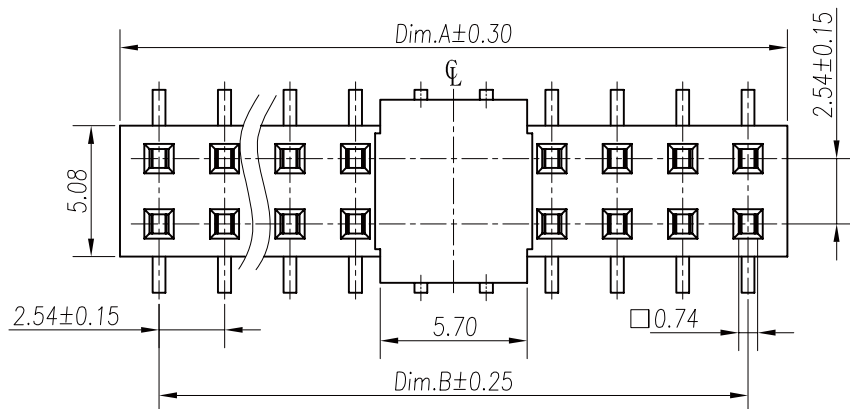

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature
 Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free)
 or the equivalent material

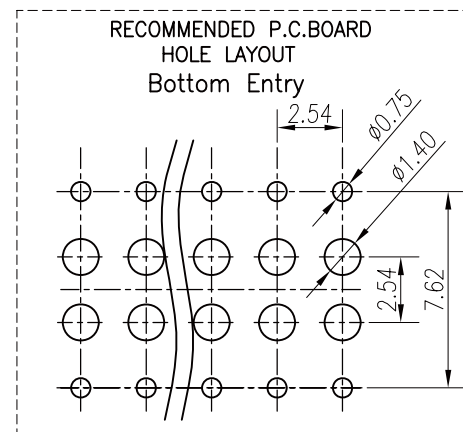
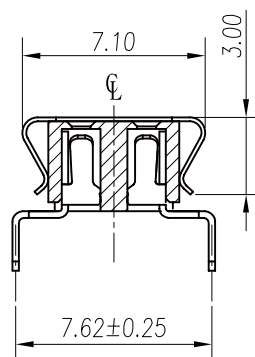
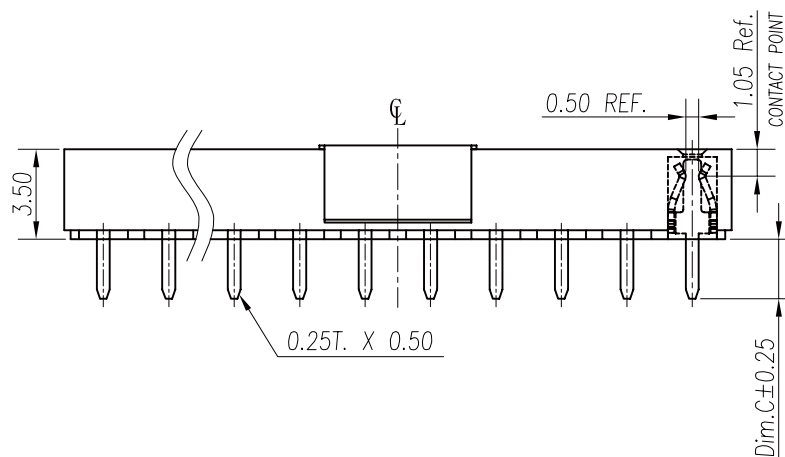


TABLE 2

No. of PIN/ROW	Dimension Dim.A	Information Dim.B
02	5.58	2.54
03	8.12	5.08
04	10.66	7.62
05	13.20	10.16
06	15.74	12.70
07	18.28	15.24
08	20.82	17.78
09	23.36	20.32
10	25.90	22.86
11	28.44	25.40
12	30.98	27.94
13	33.52	30.48
14	36.06	33.02
15	38.60	35.56
16	41.14	38.10
17	43.68	40.64
18	46.22	43.18
19	48.76	45.72
20	51.30	48.26
21	53.84	50.80
22	56.38	53.34
23	58.92	55.88
24	61.46	58.42
25	64.00	60.96
26	66.54	63.50
27	69.08	66.04
28	71.62	68.58
29	74.16	71.12
30	76.70	73.66
31	79.24	76.20
32	81.78	78.74
33	84.32	81.28
34	86.86	83.82
35	89.40	86.36
36	91.94	88.90
37	94.48	91.44
38	97.02	93.98
39	99.56	96.52
40	102.10	99.06

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-B76H35C-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X40:80WAY
 CAP
 HIGH 3.5mm
 BOTTOM BNTRY 7.62mm

DESCRIPTION: 2.54 Female Header Dual Rows DIP Type Connector