

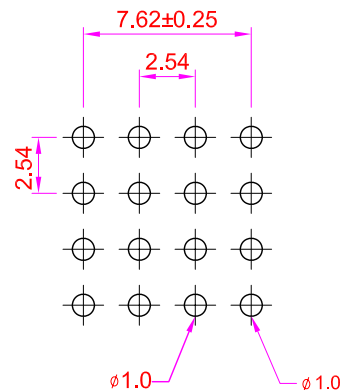
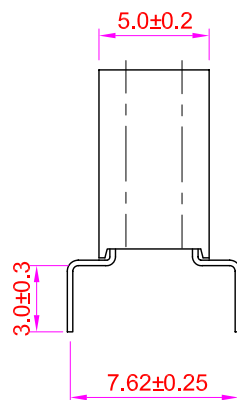


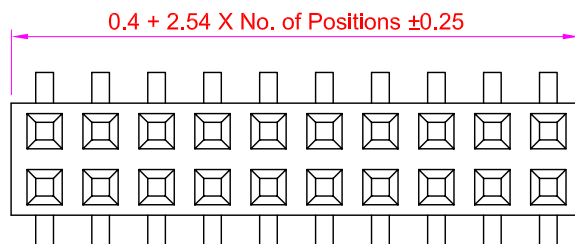

Recommended
P.C. Board Hole Layout

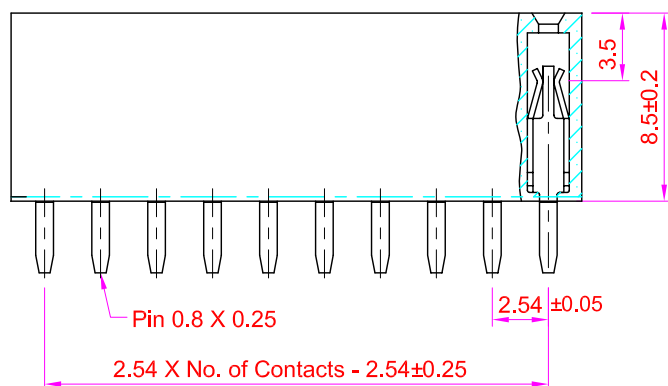

Specifications

Current Rating : 3 Amps

Insulator Resistance : 1000 Megohms min.

Contact Resistance : 20 m ohms max.

Dielectric Withstanding : AC 600V

Operating Temperature : -40°C ~ +105°C

Contact Material : Phosphor Bronze

Insulator Material : Polyester, UL 94V-0 Nylon-6T

Contact Plated : See Option

Standard: Full Gold Flash

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-B76H85-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X40:80WAY
HIGH 8.5mm
BOTTOM BENTRY 7.62mm

DESCRIPTION: Female Header P:2.54 x 2.54 mm Profile : 8.5mm, Bottom Entry Type ,Dual Ro