
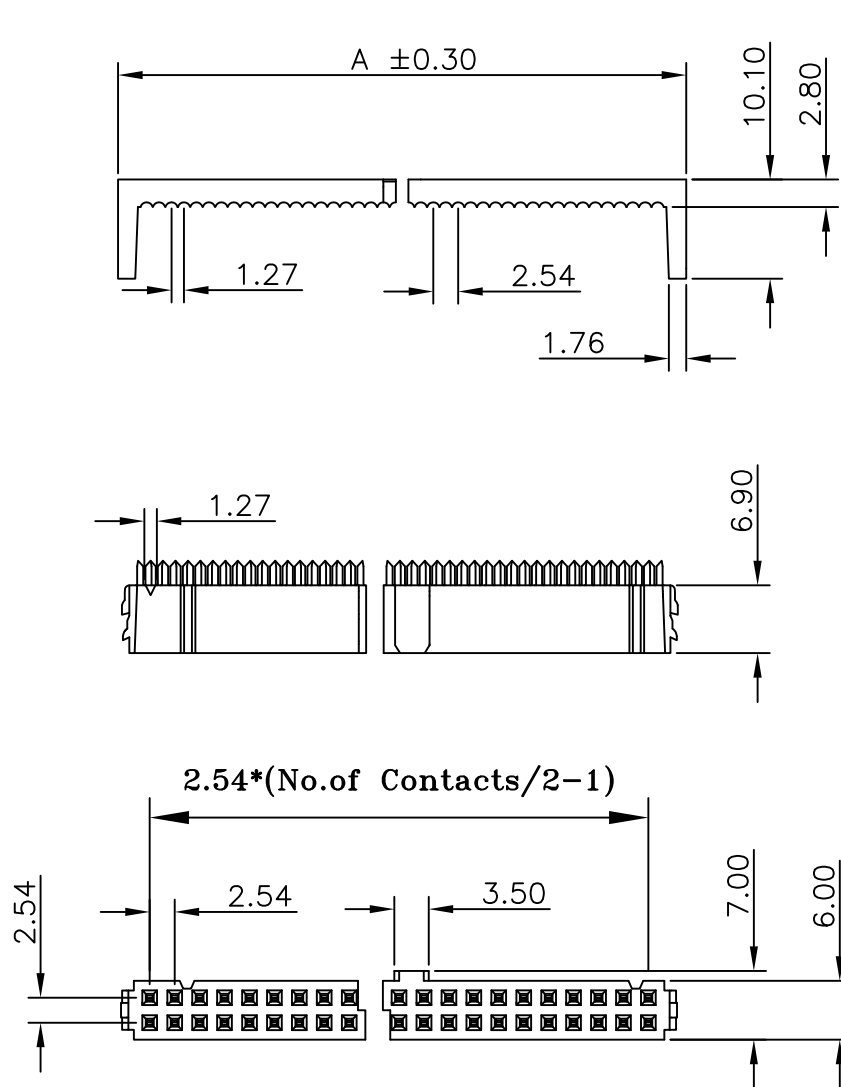


MATERIALS:
 INSULATOR: P.B.T. 30% GLASS FIBER, UL94V-0
 CONTACT MATERIAL: BRASS OR PHOSPHOR BRONZE, GOLD FLASH OVER NICKEL

ELECTRICAL:
 CURRENT RATING: 1AMP.
 INSULATION RESISTANCE: 1000M Ω MIN.
 CONTACT RESISTANCE: 30m Ω MAX
 DIELECTRIC WITHSTANDING: 500VAC
 OPERATING TEMPERATURE: -40°C ~ +85°C

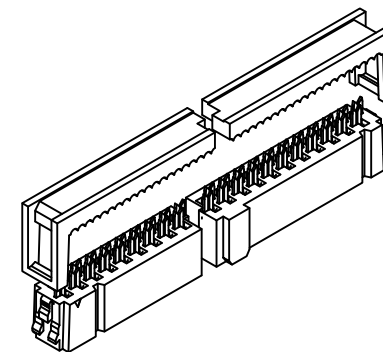

@: Table-1

CIRCUITS	A	CIRCUITS	A
10	17.24	32	45.18
14	22.32	34	47.72
16	24.86	40	55.34
20	29.94	50	68.04
24	35.02	60	80.74
26	37.56	64	85.82
30	42.64		

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
 .X $\pm$ 0.30
 .XX $\pm$ 0.20
 .XXX $\pm$ 0.10
 ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

F-C2B-xx-LF
 SERIES | T | LEADFREE
 10~64WAY
 BOX CONTACT
 TWO TYPE

DESCRIPTION: