


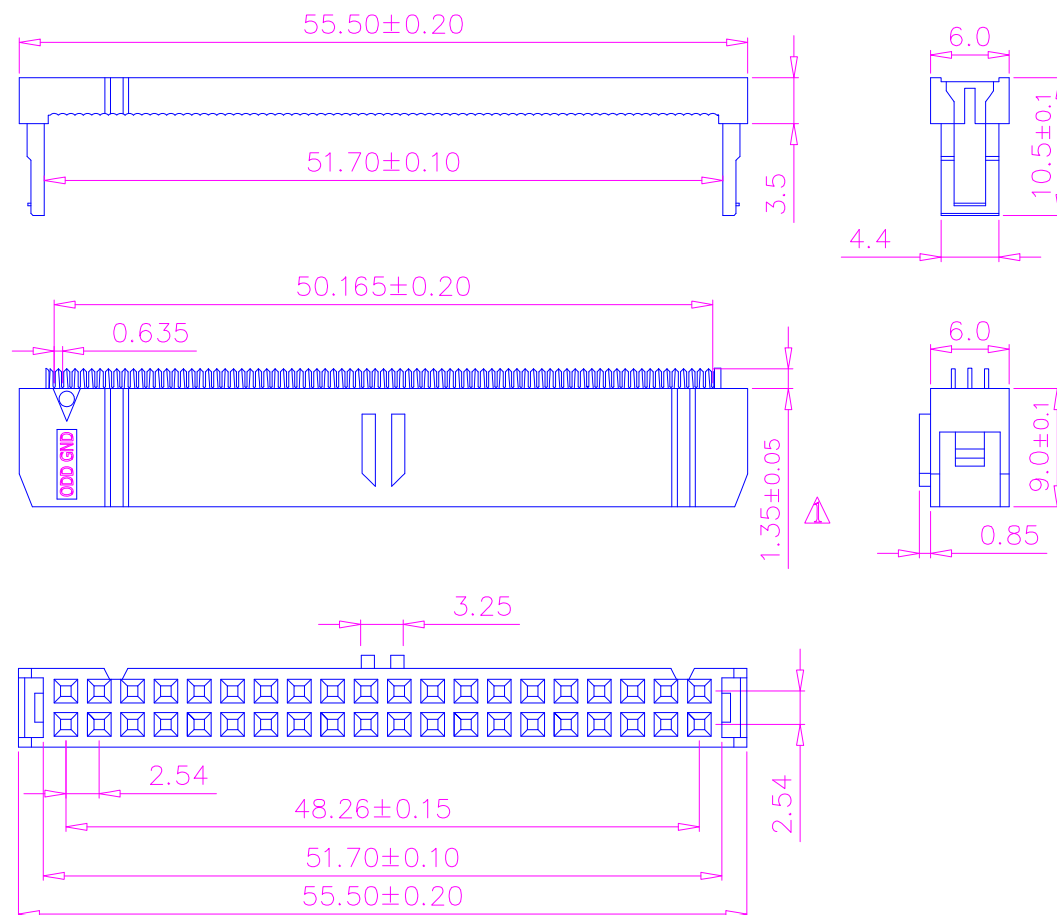

Material:

Insulator: PBT+30% Glass Fiber (UL94V-0).

Contact: Copper Alloy.

Contact Plated: Gold or Tin over Nickel Plated.

Grounding Bar: Copper Alloy with Nickel Plated.

Specification:

Current Rating: 1 Amp.

Withstanding Voltage: AC 500V for 1 Minute.

Insulation Resistance: 1000MΩ Min. at DC 500V.

Contact Resistance: 15mΩ Max..

Operating Temperature: -40°C ~ +105°C.

Grounding Connection:

Master(Black): Pin No. 2, 19, 22, 24, 26, 30, 40.

Slave(Gray): Pin No. 2, 19, 22, 24, 26, 30, 40.

System(Blue): Pin No. 2, 19, 22, 24, 26, 30, 34, 40.

Assembly of the Pins:

Master(Black): Full Pin. (F-C2S-40)

Slave(Gray): Pull Pin No. 28. (F-C2SGE-40)

System(Blue): Cut Pin No. 34. (F-C2SBL-40)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-C2S-40-LF
SERIES | LEADFREE
40 WAY
0.635mm CABLE
TWO TYPE

DESCRIPTION: