


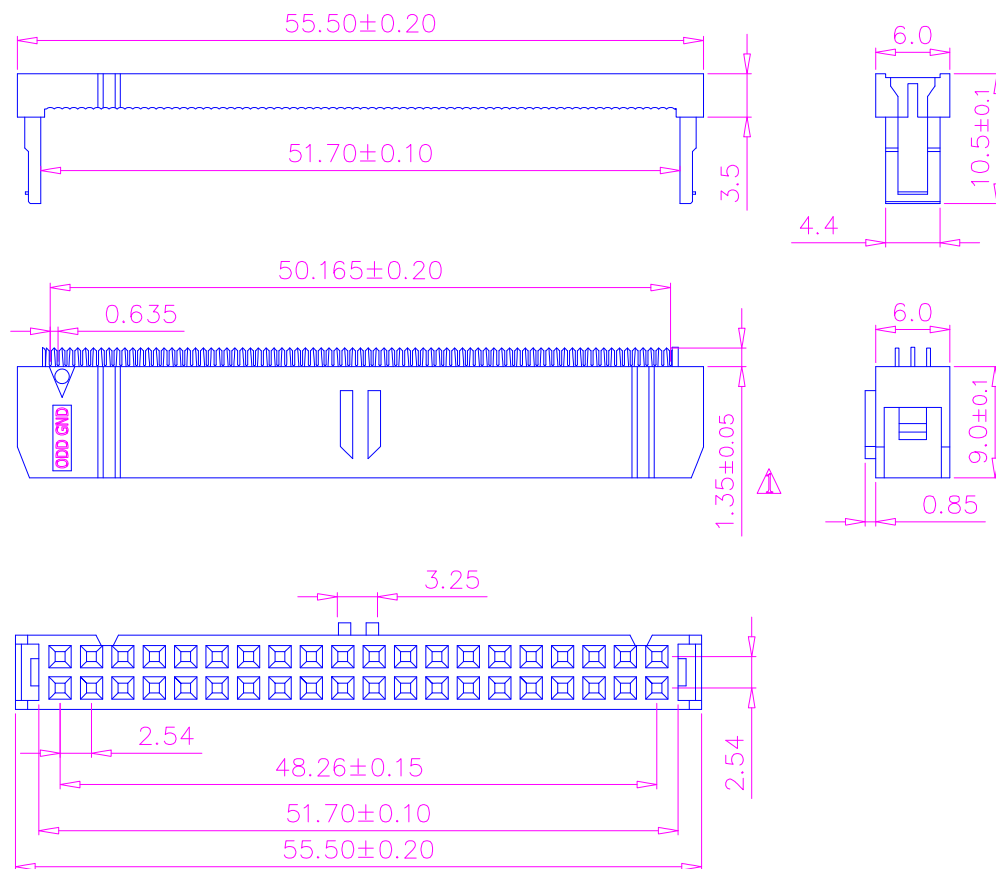


Material:
 Insulator: PBT+30% Glass Fiber (UL94V-0).
 Contact: Copper Alloy.
 Contact Plated: Gold or Tin over Nickel Plated.
 Grounding Bar: Copper Alloy with Nickel Plated.

Specification:
 Current Rating: 1 Amp.
 Withstanding Voltage: AC 500V for 1 Minute.
 Insulation Resistance: 1000MΩ Min. at DC 500V.
 Contact Resistance: 15mΩ Max..
 Operating Temperature: -40°C ~ +105°C.

Grounding Connection:
 Master(Black): Pin No. 2, 19, 22, 24, 26, 30, 40.
 Slave(Gray): Pin No. 2, 19, 22, 24, 26, 30, 40.
 System(Blue): Pin No. 2, 19, 22, 24, 26, 30, 34, 40.

Assembly of the Pins:
 Master(Black): Full Pin. (F-C2SL-40)
 Slave(Gray): Pull Pin No. 28. (F-C2SLGE-40)
 System(Blue): Cut Pin No. 34. (F-C2SLBL-40)

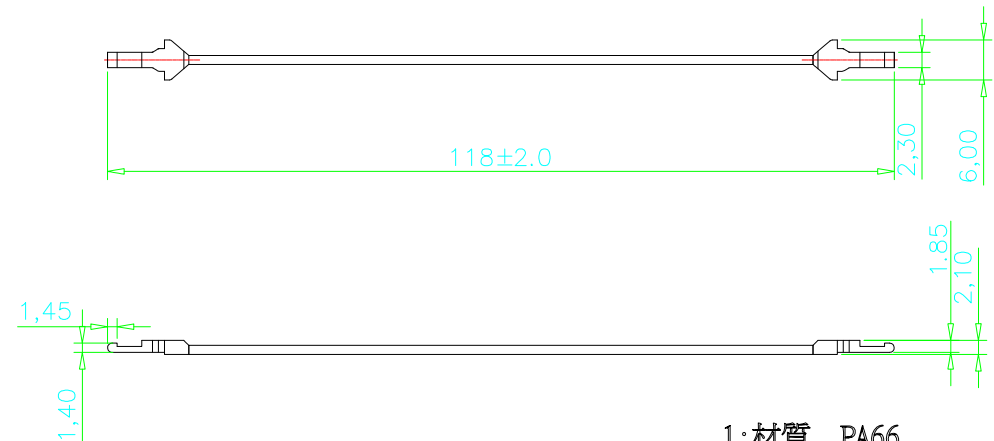

1:材質 PA66
 2:耐燃等級 UL94V-0

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-C2SL-40-LF
 SERIES LEADFREE
 40 WAY
 SR/LOCK
 0.635mm CABLE
 TWO TYPE

DESCRIPTION: