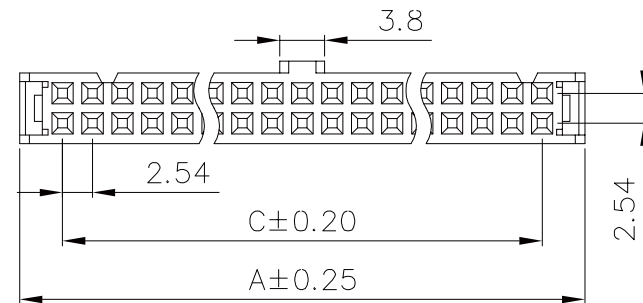

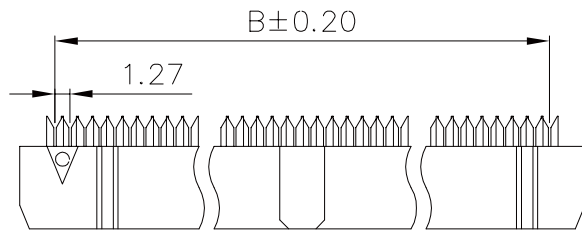

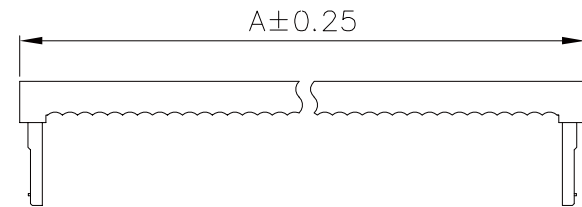


Material:

Insulator: PBT+30% Glass Fiber (UL94V-0).

Contact: Copper Alloy.

Contact Plated: Gold or Tin over Nickel Plated.

Specification:

Current Rating: 1 Amp.

Withstanding Voltage: AC 500V for 1 Minute.

Insulation Resistance: 1000MΩ Min. at DC 500V.

Contact Resistance: 15mΩ Max..

Operating Temperature: -40°C ~ +105°C.

Pos.	Dim. A	Dim. B	Dim. C
6	12.32	6.35	5.08
8	14.86	8.89	7.62
10	17.40	11.43	10.16
12	19.94	13.97	12.70
14	22.48	16.51	15.24
16	25.02	19.05	17.78
18	27.56	21.59	20.32
20	30.10	24.13	22.86
24	35.18	29.21	27.94
26	37.72	31.75	30.48
30	42.80	36.83	35.56
34	47.88	41.91	40.64
36	50.42	44.45	43.18
40	55.50	49.53	48.26
44	60.58	54.61	53.34
50	68.20	62.23	60.96
60	80.90	74.93	73.66
64	85.98	80.01	78.74

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

F-C3L-xx-LF
SERIES | LEADFREE
06~64WAY
SR/LOCK
THREE TYPE

DESCRIPTION: 2.54mm IDC Connector Single Contact/with Nose Type

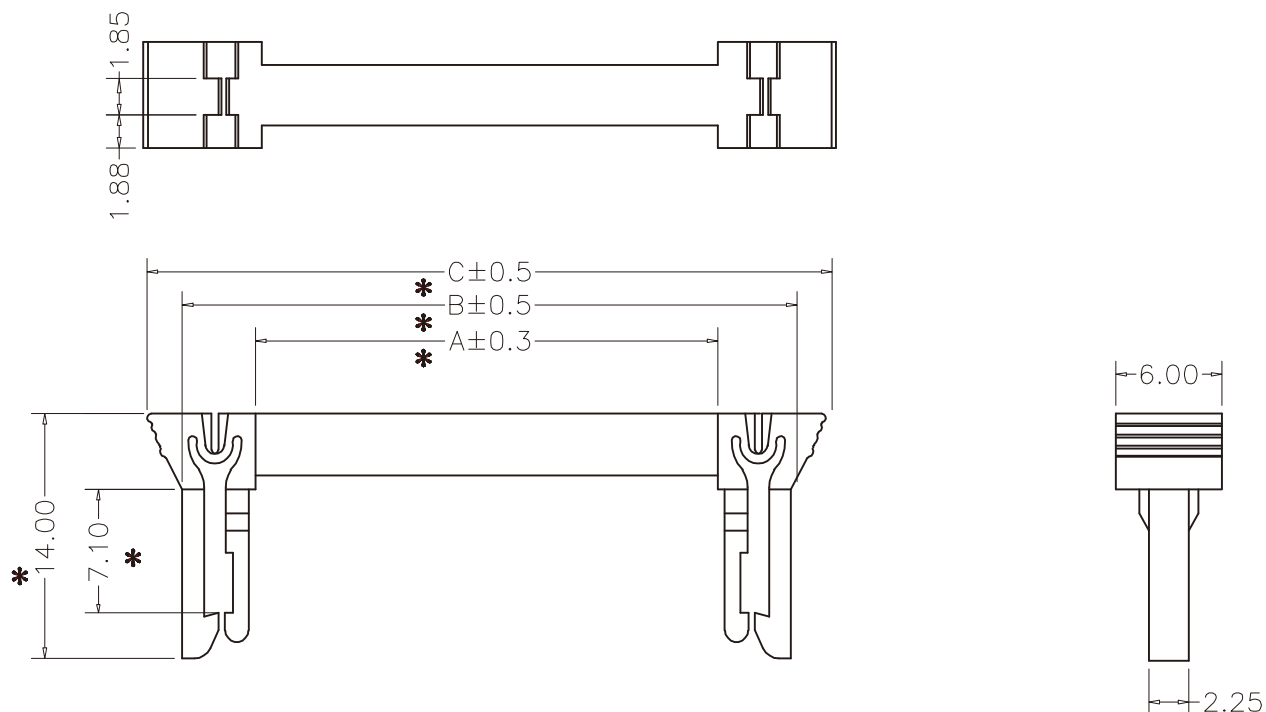

* 材质:PBT+25% 94V0
 尺寸标有“*”的代号为重点检测位置.
 塑件不可有披锋, 烧焦及缺料现象.
 表面不可有拉伤, 气纹等的出现.

POLES	DIM.A	DIM.B	DIM.C
06	8.02	17.0	21.40
08	10.56	19.54	23.94
10	13.10	22.08	26.48
12	15.64	24.62	29.02
14	18.18	27.16	31.56
16	20.72	29.70	34.10
20	25.80	34.78	39.18
26	33.42	42.40	46.80
30	38.50	47.48	51.88
34	43.58	52.56	56.96
40	51.20	60.18	64.58
50	63.9	72.88	77.28

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-C3L-xx-LF
 SERIES LEADFREE
 06~64WAY
 SR/LOCK
 THREE TYPE

DESCRIPTION: IDC 2.54-蝴蝶扣