


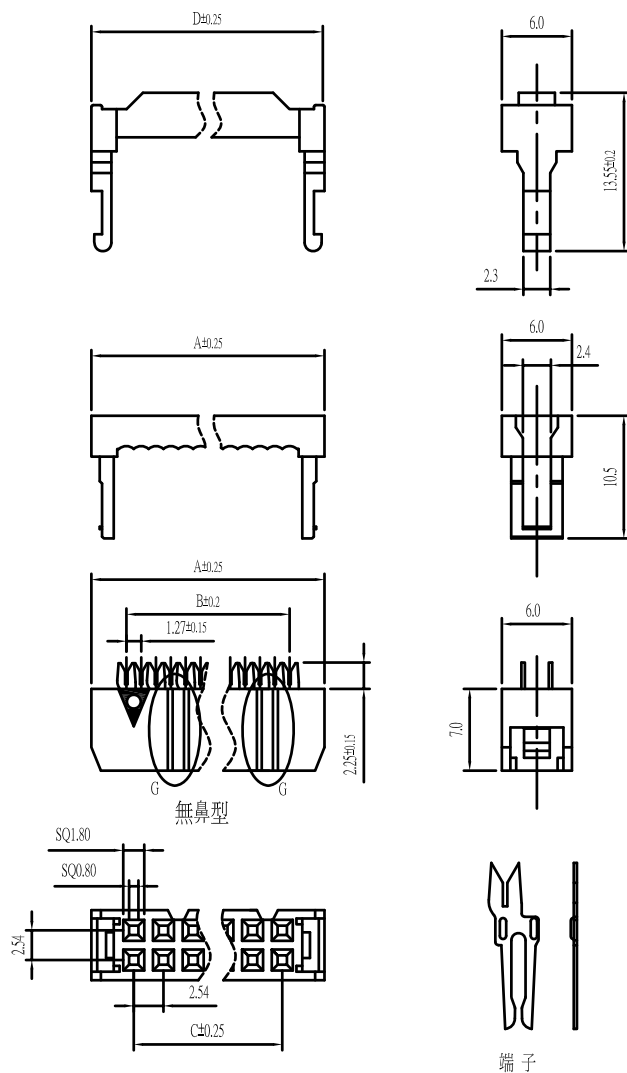

Pos.	Dim.A	Dim.B	Dim.C	Dim.D
6	12.32	6.35	5.08	12.12
8	14.86	8.89	7.62	14.66
10	17.40	11.43	10.16	17.20
12	19.94	13.97	12.70	19.74
14	22.48	16.51	15.24	22.28
16	25.02	19.05	17.78	24.82
18	27.56	21.59	20.32	27.36
20	30.10	24.13	22.86	29.90
24	35.18	29.21	27.94	34.98
26	37.72	31.75	30.48	37.52
30	42.80	36.83	35.56	42.60
34	47.88	41.91	40.64	47.68
40	55.50	49.53	48.26	55.30
44	60.58	54.61	53.34	60.38
50	68.20	62.23	60.96	68.00
60	80.90	74.93	73.66	80.70
64	85.98	80.01	78.74	85.78

備注:

- 1.加反折為3件式，不加反折為2件式。
- 2.加括號尺寸為參考尺寸。
- 3.未標示公差之尺寸參考公差表。
- 4.6PIN有鼻膠芯G處兩邊都無凹槽，無鼻膠芯G處只有一邊有凹槽；
8/10/12PIN G處只有一邊有凹槽，14及14PIN以上G處兩邊都有凹槽。
- 5.A規格：6PIN有鼻膠芯G處只有一邊有凹槽。

*Material:

Insulator: PBT+Glass Fiber (UL94V-0).

Contact: Copper Alloy.

Contact Plated: Gold or Tin over Nickel Plated.

All material accord with ROHS。

*Specification:

Withstanding Voltage: AC 500V for 1 Minute.

Insulation Resistance: 100 MΩ Min. at DC 500V.

Contact Resistance: 1 Ω Max..

Operating Temperature: -40℃ --- +105℃.

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

F-C3YX-xx-LF
 SERIES | LEADFREE
 06~64WAY
 NON NOSE
 Y TERMINAL
 THREE TYPE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ±

PPOJECTION

DESCRIPTION: