


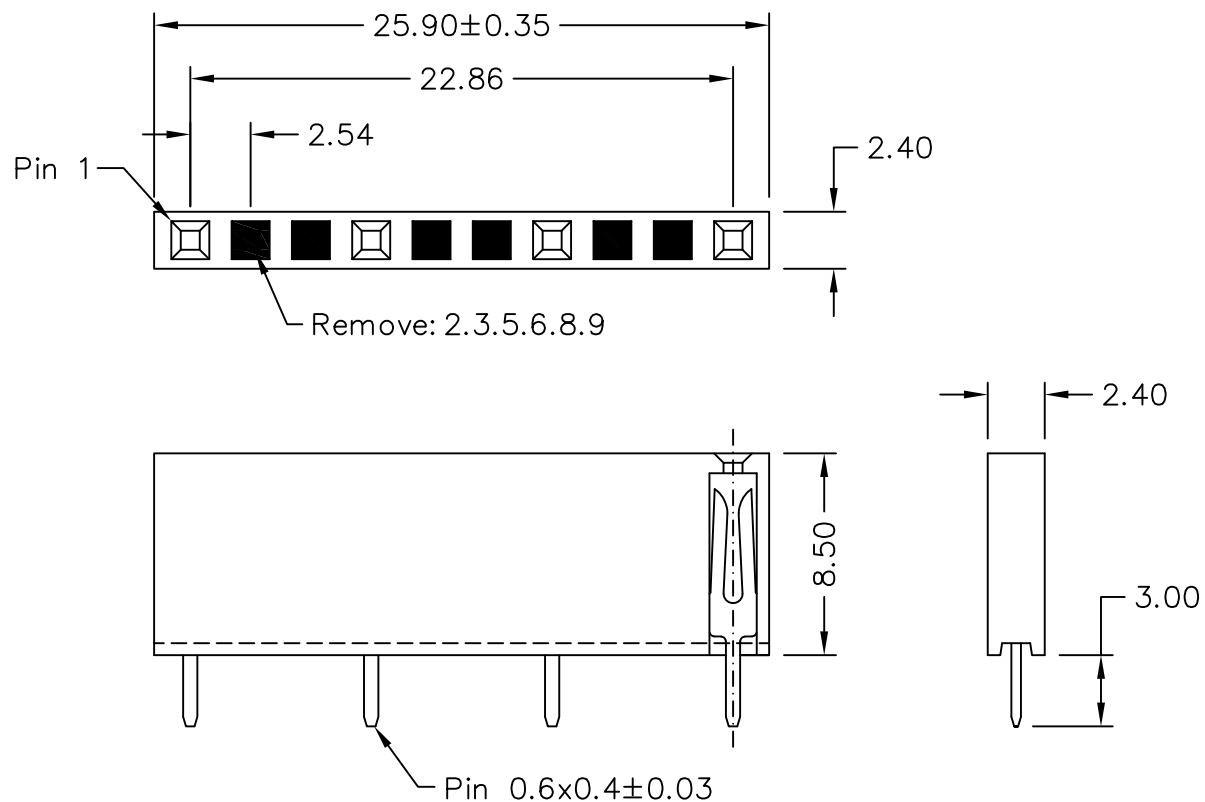

MATERIAL

Contact Pin : Brass

Insulator: PBT UL94-V0

SPECIFICATION


Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

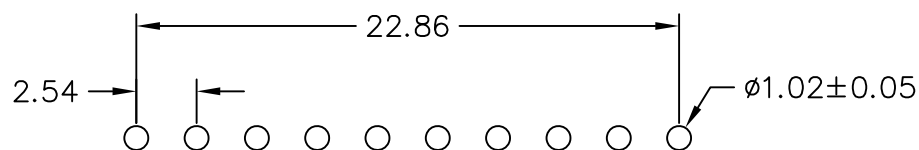

Recommended P.C.B Layout

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

ORDER INFORMATION

F-D-1X10E235689-LF

SERIES

10 WAY
DIP 180°

LEADFREE
EMPTY 2.3.5.6.8.9 PIN

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: FEMALE HEADER 2.54*2.54mm STRAIGHT TYPE, SINGLE ROW HEIGHT 8.5mm