

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600V AC/DC



Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
P.B.T

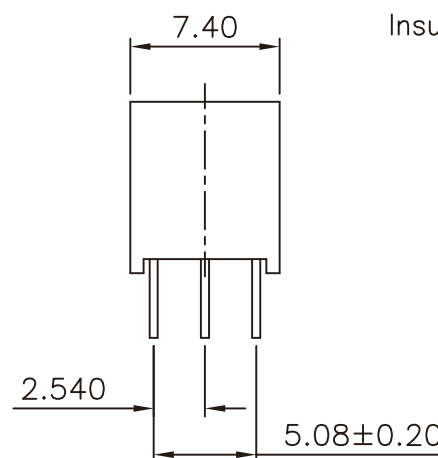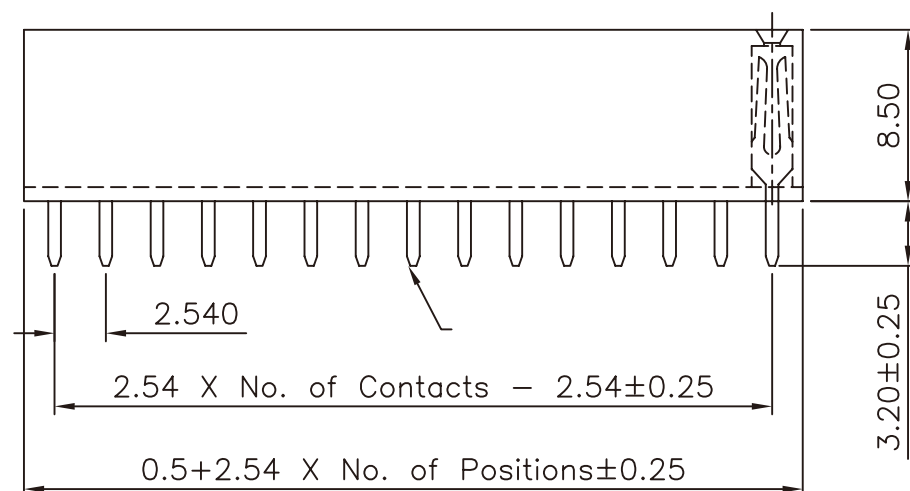

Recommended P.C.Board
Hole Layout

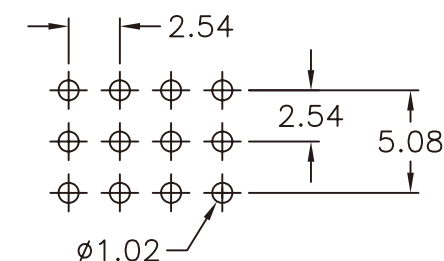

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±



ORDER INFORMATION

F-D-3Xxx-LF
SERIES LEADFREE
3X03:09WAY
3X32:96WAY
DIP 180°

DESCRIPTION: 2.54 FEMALE HEADER TRIPLE ROWS DIP TYPE BASE 8.50H