

MATERIAL

Contact Pin : Brass



SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

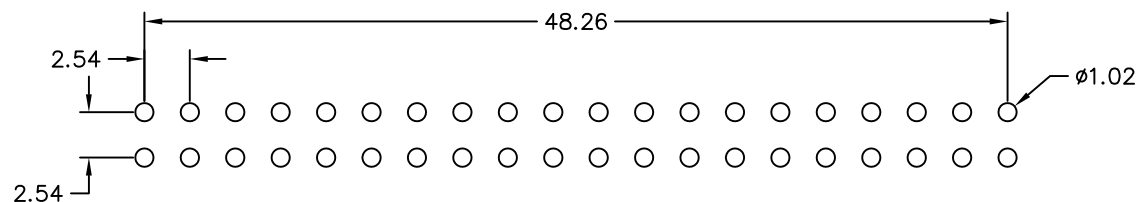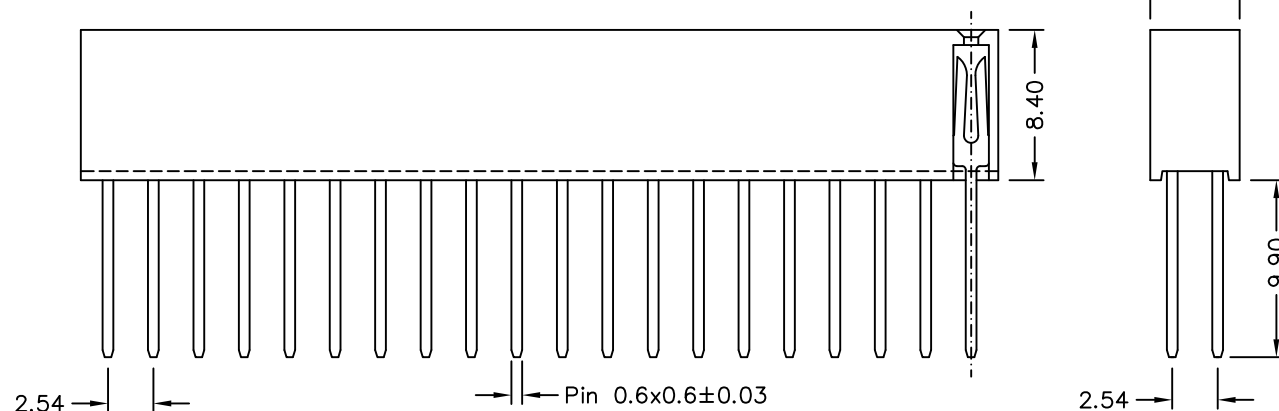

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

F-D0809-2X20-LF
SERIES | 40 WAY | LEADFREE
DIP 9.90mm
HIGH 8.5mm
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: FEMALE HEADER 2.54*2.54mm STRAIGHT TYPE, DUAL ROWS HEIGHT 8.4mm