

MATERIAL

Insulator : PBT+30%G.F

Contact Pin : Brass




SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

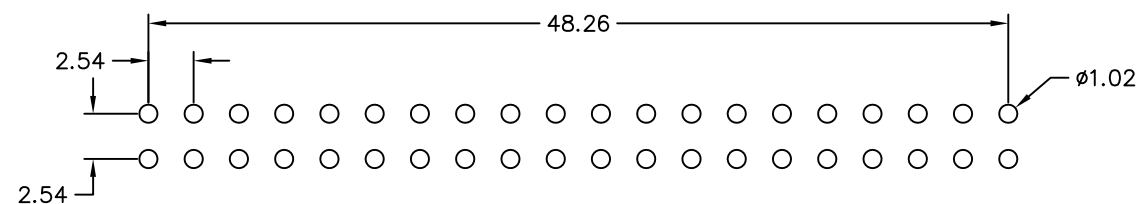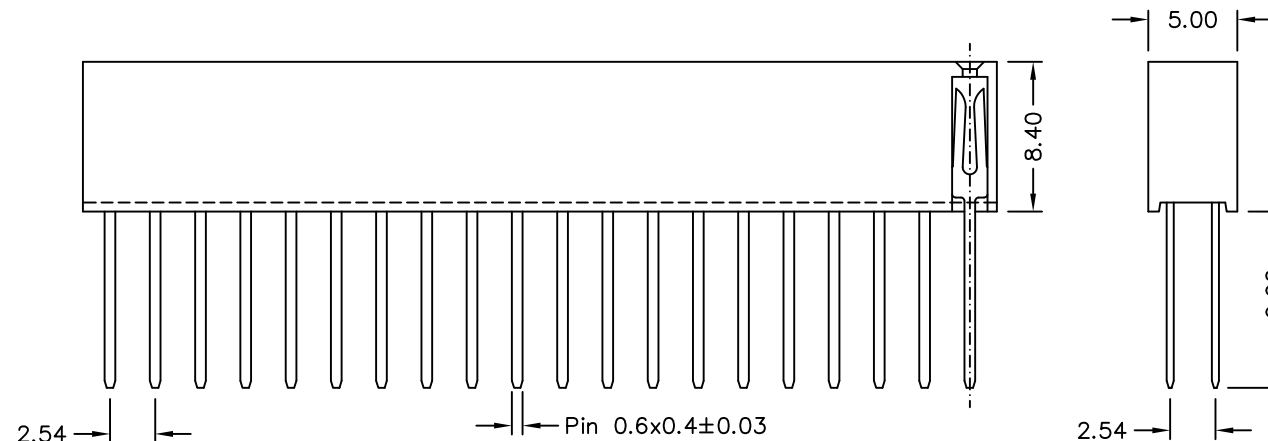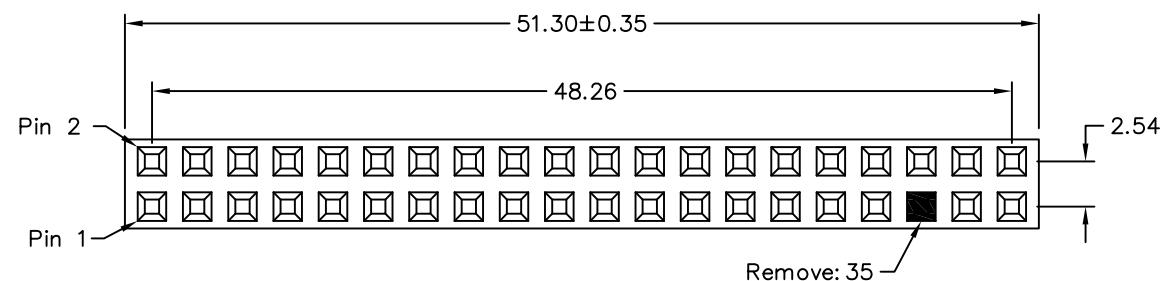

Recommended P.C.B Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

F-D0809-2X20E35-LF

SERIES
40 WAY
DIP 9.90mm
HIGH 8.5mm
DIP 180°
LEADFREE
EMPTY 35 PIN

DESCRIPTION: