
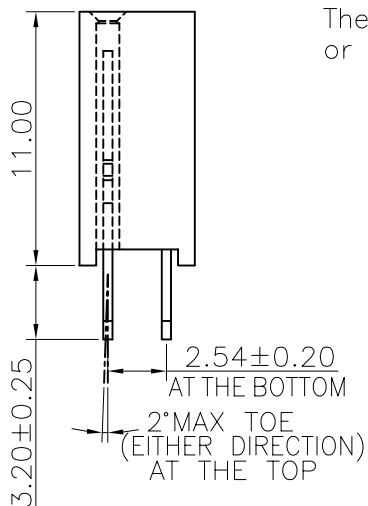
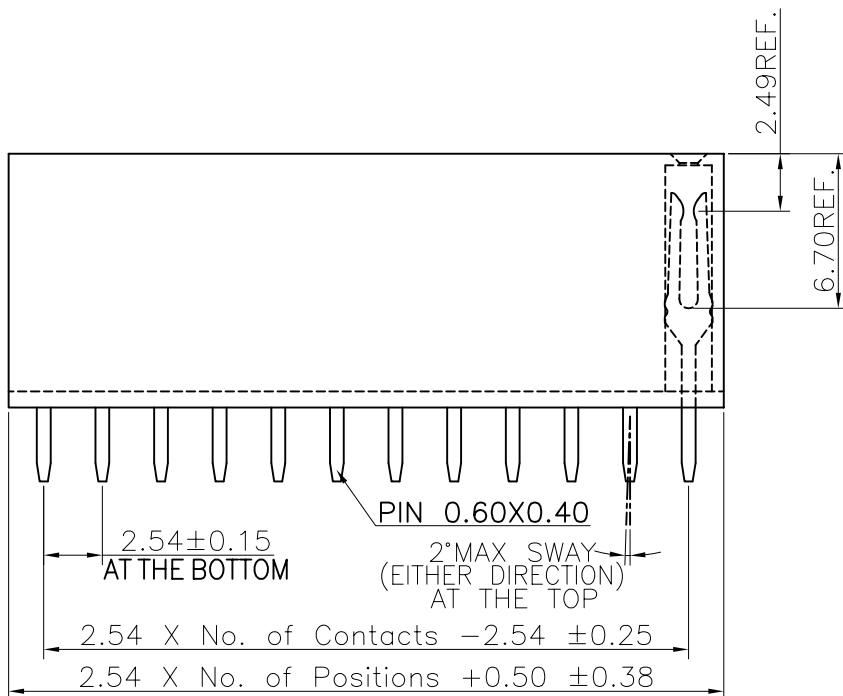


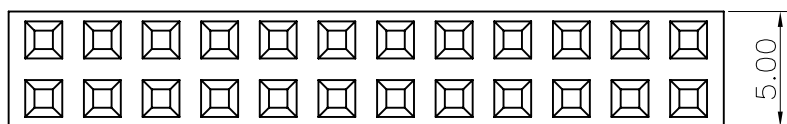

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩMin.

Dielectric Withstanding Voltage: 600VAC

Contact Resistance: 20mΩMax.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulator Material: High Temperature

Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free)
or the equivalent material

Recommended P.C.Board Layout (Tolerance: ±0.05)

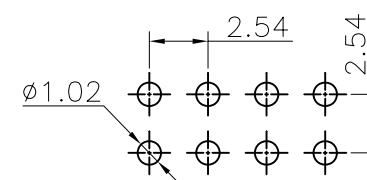

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-D110-2Xxx-LF
SERIES 2X02:04WAY LEADFREE
2X40:80WAY
HIGH 11.0mm
DIP 180°

DESCRIPTION: 2.54 FEMALE HEADER DUAL ROWS DIP TYPE CONNECTOR