

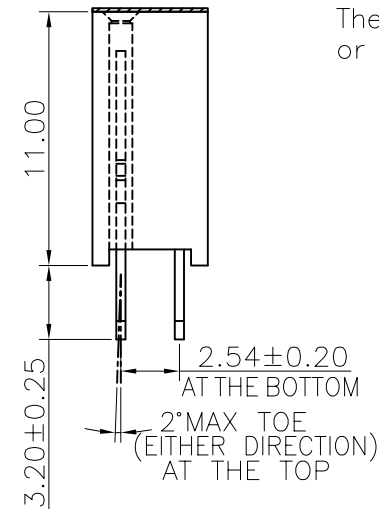


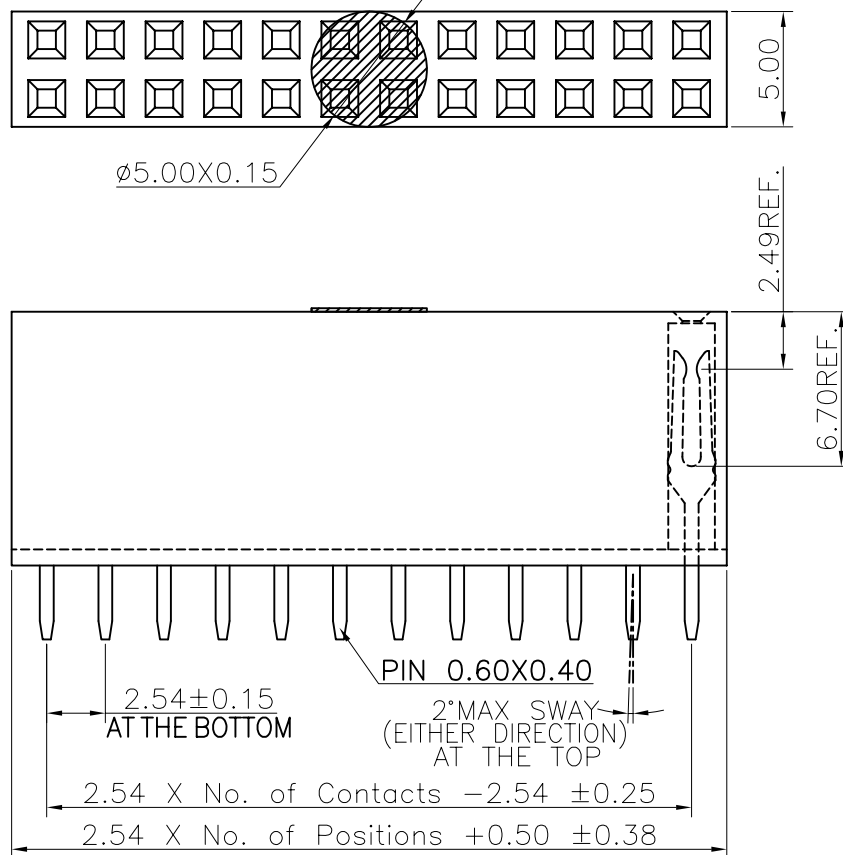

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature
 Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free)
 or the equivalent material

Recommended P.C.Board
 Layout
 (Tolerance: ±0.05)

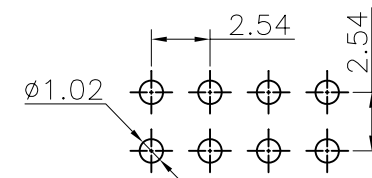

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-D110C-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY

2X40:80WAY

MYLAR

HIGH 11.0mm

DIP 180°

DESCRIPTION: 2.54 FEMALE HEADER DUAL ROWS DIP TYPE CONNECTOR