
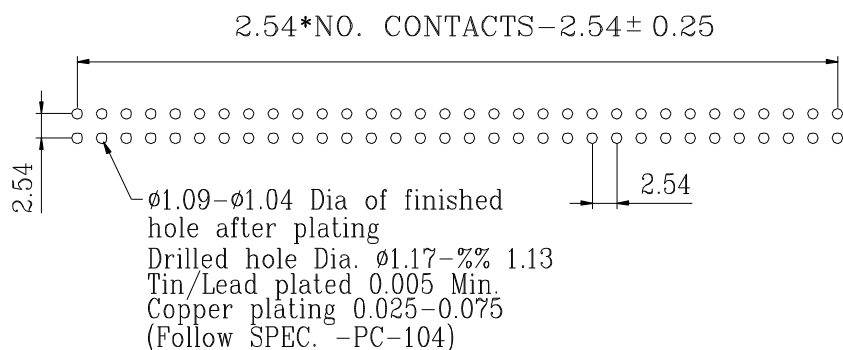

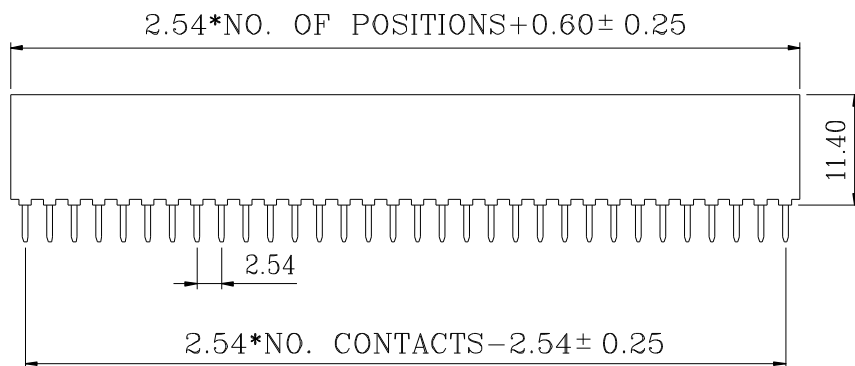


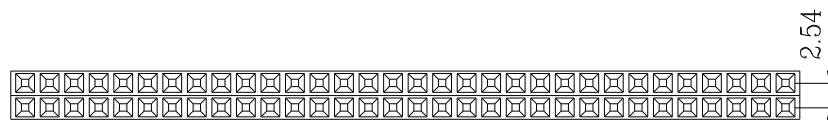

Recommend P.C.B. Layout

TOP View

SPECIFICATIONS

CURRENT RATING: 3 AMPS

INSULATOR RESISTANCE: 5000 MEGPHMS MIN.

CONTACT RESISTANCE: 20 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING: AC 500V

OPERATING TEMPERATURE: -25°C ~ +85°C

MATERIAL

CONTACT: PHOSPHOR BRONZE (GOLD FLUSH)

INSULATOR: PA-9T, UL 94V-0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.35

.XX ± 0.25

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-D114-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X40:80WAY
HIGH 11.4mm
DIP 180°

DESCRIPTION: