
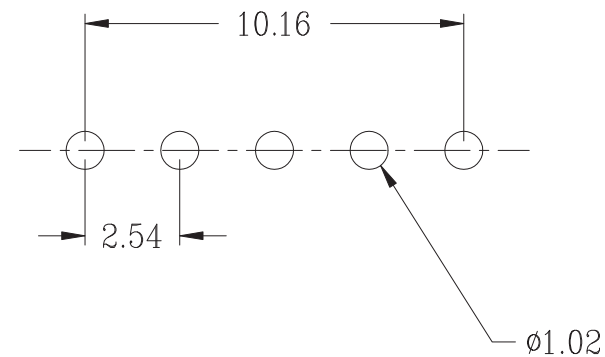
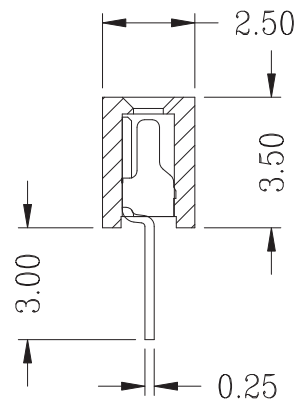
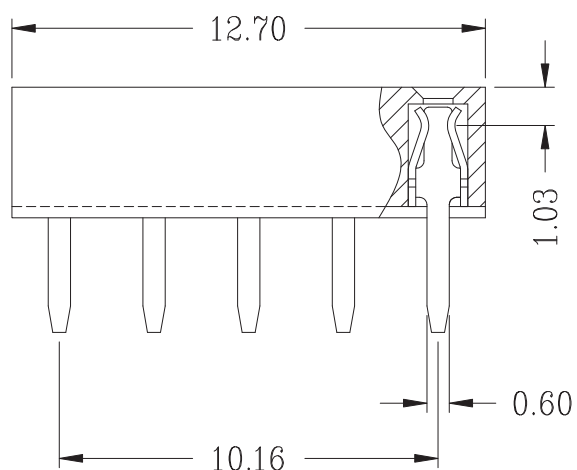




P.C.B. Layout

SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING: 600V AC/DC

CONTACT RESISTANCE: 20m OHMS MAX.

OPERATING TEMPERATURE: -40°C ~ +105°C

MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: POLYESTER, UL 94V-0
NYLON 6T

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.35
.XX ± 0.25
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

F-D35C-1X05-LF
SERIES | 05 WAY | LEADFREE
THREE CONTACT
HIGH 3.5mm
DIP 180°

DESCRIPTION: 2.54mm Female Socket Single DIP type (H=3.5)