

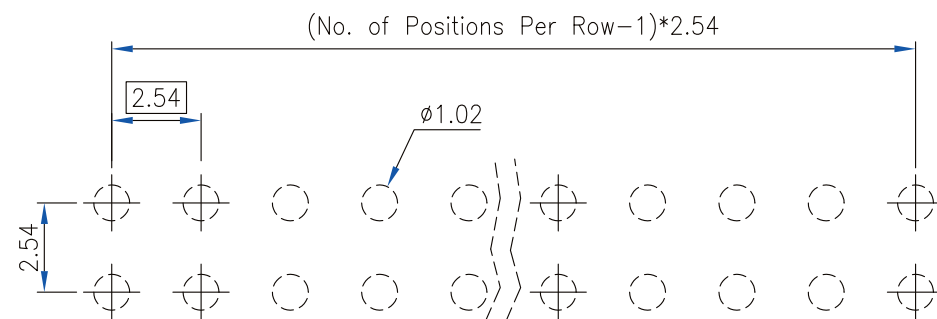
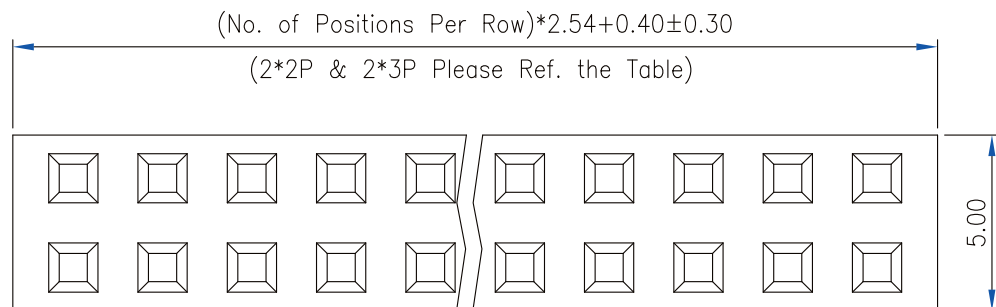


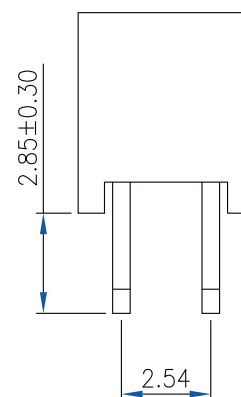

PCB Layout
(Top View)

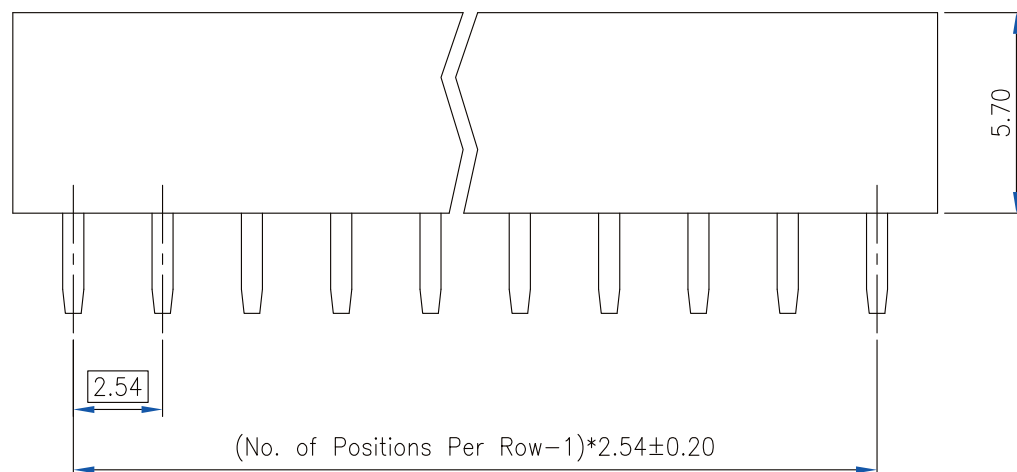

Material and Finish

1. Housing: PBT (UL94V-0), Black.
2. Terminal: Copper Alloy ($t=0.40\text{mm}$), Gold Plating

Electrical Characteristics

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage:
1000V AC RMS for 60Seconds.
3. Insulation Resistance:
1000M Ohms Min. at 1000V DC.
4. Contact Resistance: 30m Ohms Max.

Mechanical Characteristics

1. Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

F-D57-2Xxx-LF
SERIES LEADFREE
2X02:04 WAY
2X40:80 WAY
HIGH 5.7mm
DIP 180°

DESCRIPTION: 2.54mm Post Header Receptacle PCB Mount Vertical Type Dual Rows (H=5.70mm)