
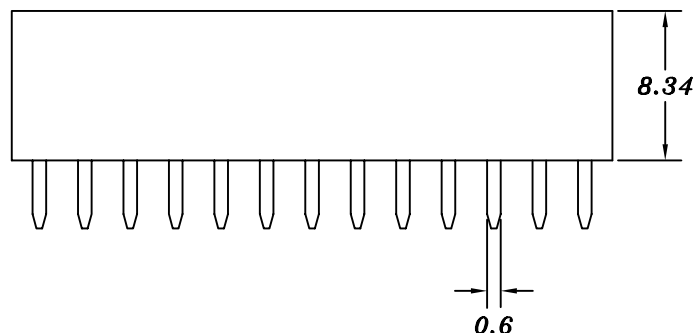
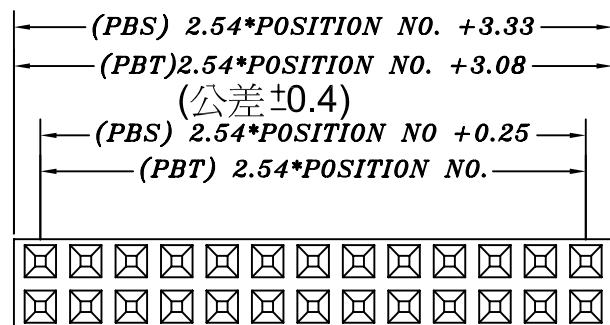


Pc Board Layout

- 1 . Compact and low profile design for saving space
- 2 . High reliable contact with low insertion force.
- 3 . Straight and right angle type facilitate engineering design.
- 4 . Mate with flexible Printed Circuit.

Current Rating 1 Amp
 Insulator resistance 5000 Megohms min .
 500v DC for 1 minutes.
 Contact resistance 20 m ohm Max.
 Dielectric withstanding AC 500 v for 1 minutes.
 Operating Temperature $-40^{\circ}C \sim 105^{\circ}C$
 Contact Material Phosphor bronze
 insulator Material Polyester, UL 94v-0
 standard P.B.T (1 X2~1 X 40)
 P.B.T (2X2~2X24)
 P.P.S (2X26~2X40)

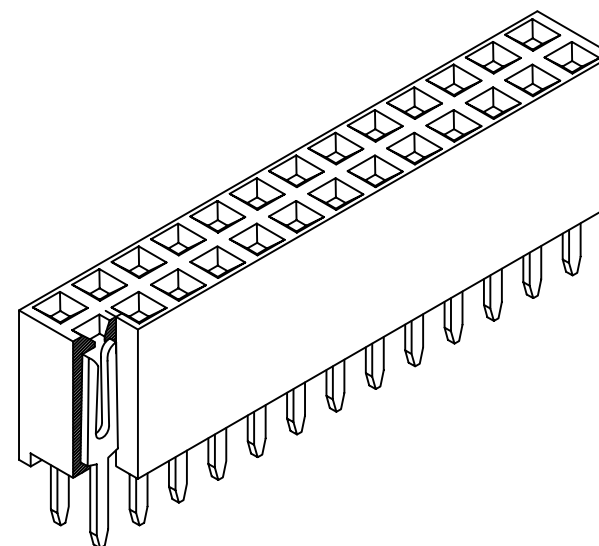

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫有限公司

PART NO. F-D84-2Xxx

DWG NO. F-D84-2Xxx

FILE NO.


UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X
 .XX
 .XXX
 AWG

DESCRIP TION: 2.54mm P.C.B FEMALE 180°

AREA

REVISIONS

HK

DATE