



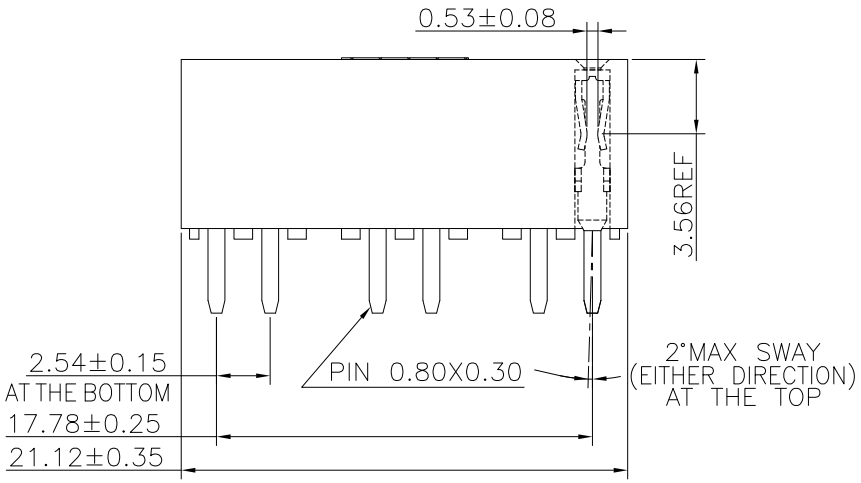


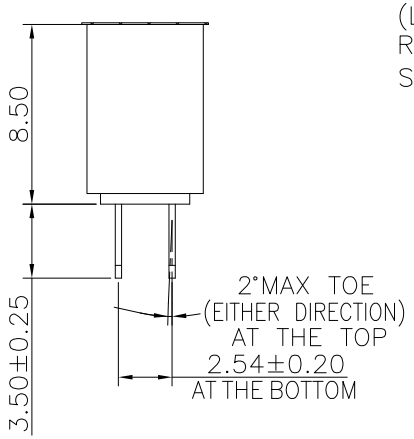

Specifications
Current Rating:3Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:600VAC
Contact Resistance:20mΩMax.
Operating Temperature:−40°C to +105°C

Materials
Contact Material:Copper alloy
High Temperture Thermoplastic: Suitable for Reflow Soldering Process UL 94V-0 (LCP,NylonHTN)
Regular Thermoplastic: Only Suitable for Wave Soldering Process (PBT).

Recommended P.C.Board Layout
(Tolerance:±0.05)

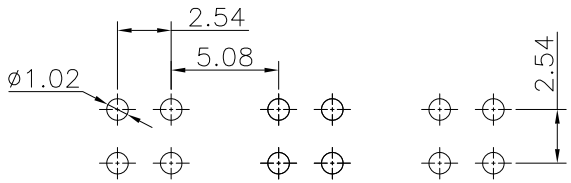

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	TOLERANCES ARE
CHECKED BY GENIUS	X. ± 0.30 .X ± 0.25 .XX ± 0.15 .XXX ± 0.10 ANG ±
UNIT / mm / SCALE 1 : 1	
DATE	
SIZE A4 PPOJECTION	

照片框

ORDER INFORMATION

F-D85D35C-2X08EP36-LF

- SERIES
- DIP 180°
- HIGH 8.5mm
- DIP 3.5mm
- MYLAR
- 16 WAY
- EMPTY PAIR 3+6
- LEADFREE

DESCRIPTION: 2.54 FEMALE HEADER DUAL ROWS DIP TYPE CONNECTOR