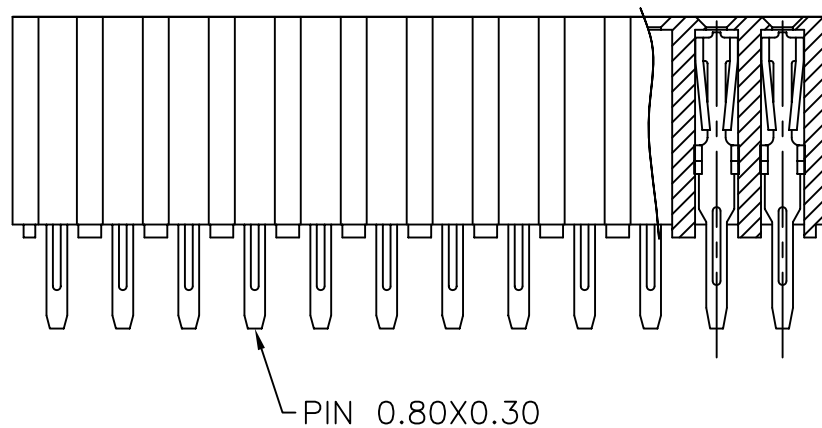
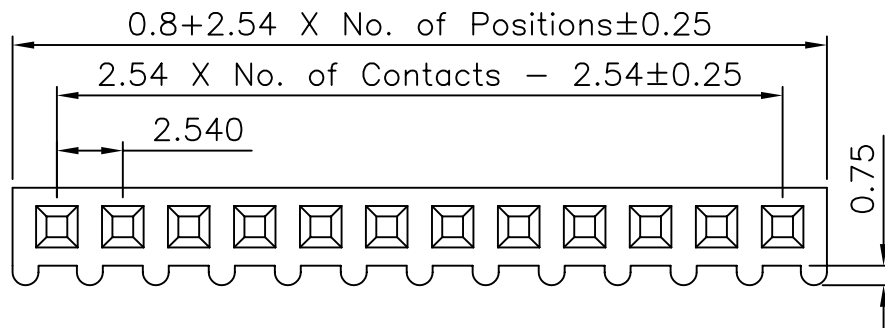


Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600V AC/DC

Contact Resistance: 20mΩ Max.


Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
P.B.T

Recommended P.C.Board Hole Layout



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

F-D85W-1Xxx-LF
SERIES | DIP 180° | W TYPE | HIGH 8.5mm | LEADFREE | 1X02:02 WAY | 1X40:40 WAY

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW DIP TYPE BASE 8.50H