
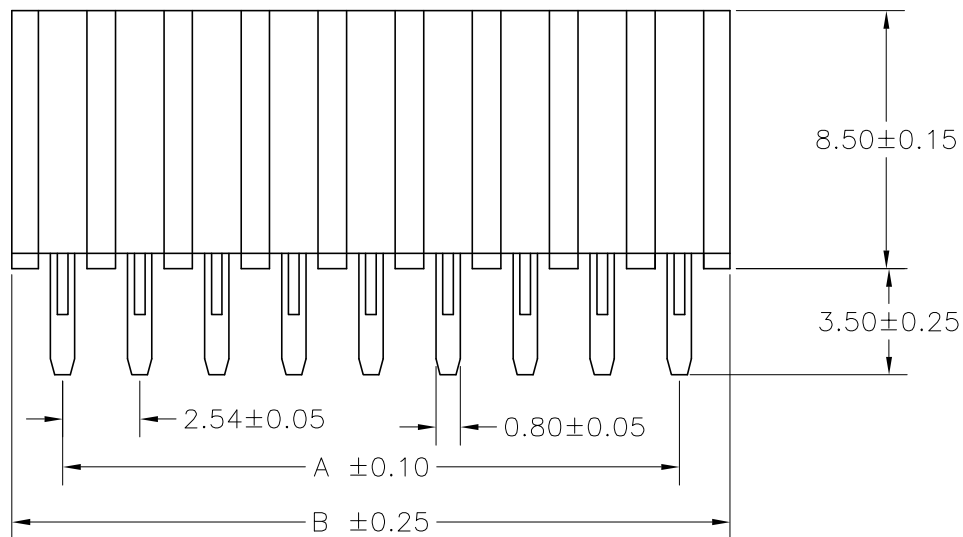


No. of Contacts	DIMENSIONS	
	A	B
6	5.08	8.42
8	7.62	10.96
10	10.16	13.50
12	12.70	16.04
14	15.24	18.58
16	17.78	21.12
18	20.32	23.66
20	22.86	26.20
22	25.40	28.74
24	27.94	31.28
26	30.48	33.82
28	33.02	36.36
30	35.56	38.90
32	38.10	41.44
34	40.64	43.98
36	43.18	46.52
38	45.72	49.06
40	48.26	51.60
42	50.80	54.14
44	53.34	56.68
46	55.88	59.22
48	58.42	61.76
50	60.96	64.30
52	63.50	66.84
54	66.04	69.38
56	68.58	71.92
58	71.12	74.46
60	73.66	77.00
62	76.20	79.54
64	78.74	82.08
66	81.28	84.62
68	83.82	87.16
70	86.36	89.70
72	88.90	92.24
74	91.44	94.78
76	93.98	97.32
78	96.52	99.86
80	99.06	101.50

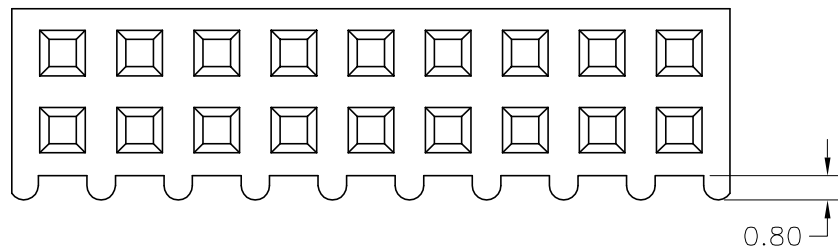

SPECIFICATIONS


Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: $-40^{\circ}\sim+105^{\circ}\text{C}$
 Contact Material: Phosphor bronze
 Insulator Material: Polyester, UL 94V-0
 ©Standard: P.B.T

Finish: Tin, Gold or Duplex plated

©Standard: Gold flash all over

©Note:

Duplex plating: gold plated on contact area,
Tin on solder area

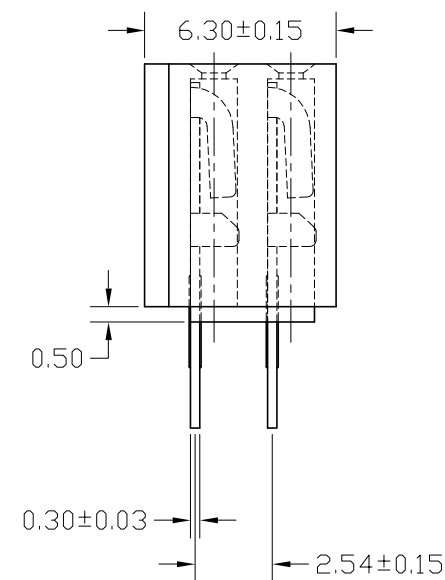

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

F-D85W-2Xxx-LF
 SERIES 2X03:06 WAY
 DIP 180° W TYPE
 LEADFREE 2X40:80 WAY
 HIGH 8.5mm

DESCRIPTION: