
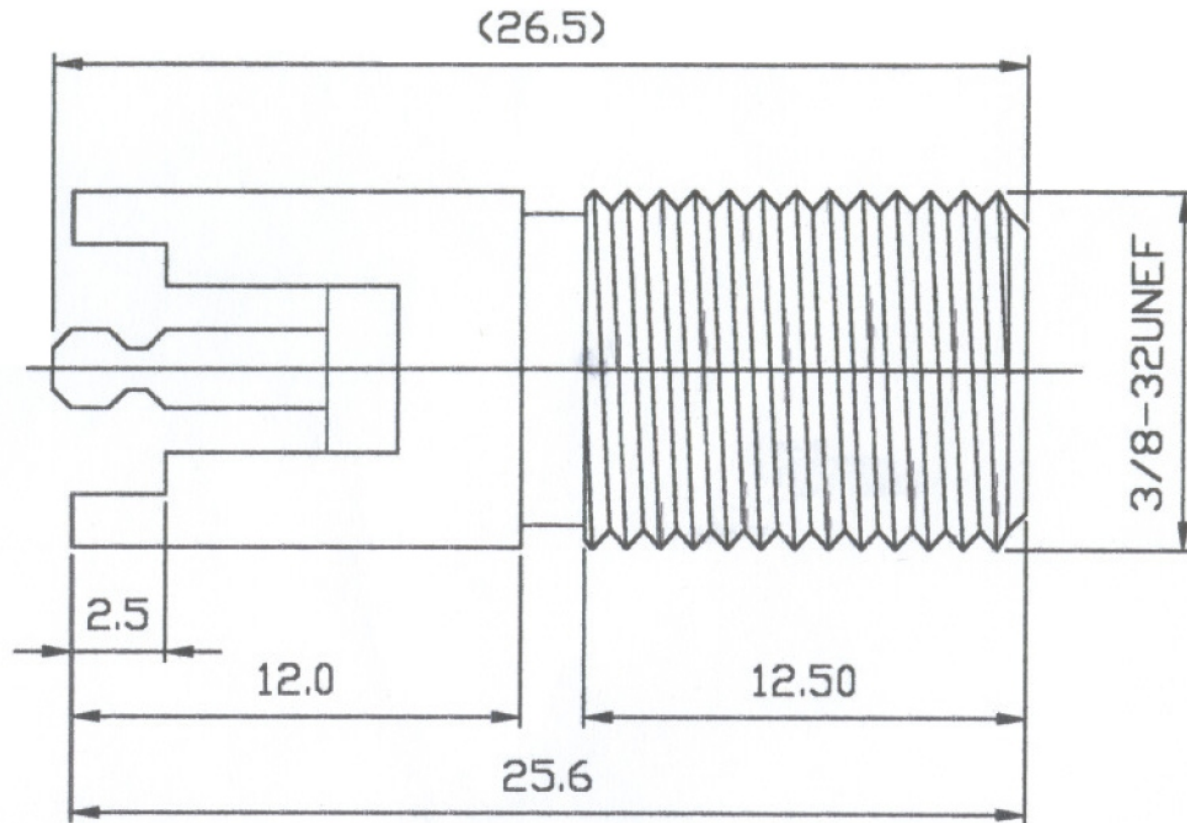


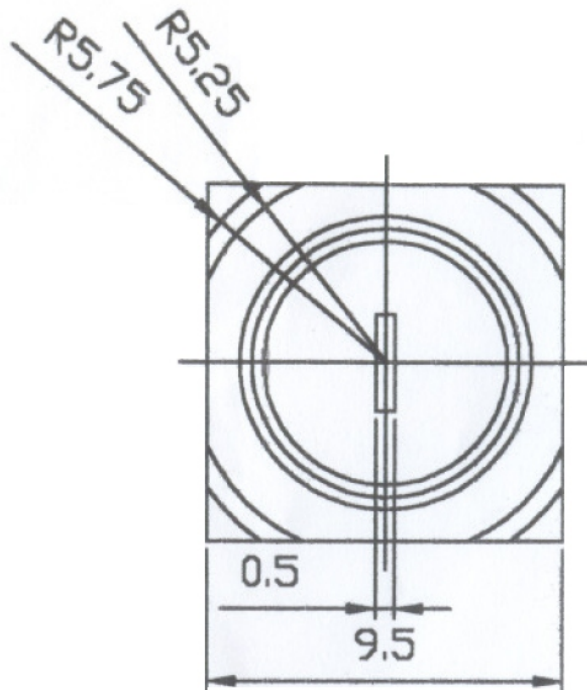

ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: AC 150V
WITHSTANDING VOLTAGE: AC 500V ONE MINUTE
INSULATION RESISTANCE: 500M OHM MIN AT DC 500V
CONTACT RESISTANCE: 5M OHM AT DC 1A
IMPEDANCE: 75 OHM NOMINAL

F-JD24-75-LF
LEADFREE

RoHS Compliant

4	INSULATOR	P.P	WHITE	1
3	INSULATOR	P.P	WHITE	1
2	PIN	BRASS	TIN	1
1	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. **F-JD24-75**

DWG NO. **F-JD24-75**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司