


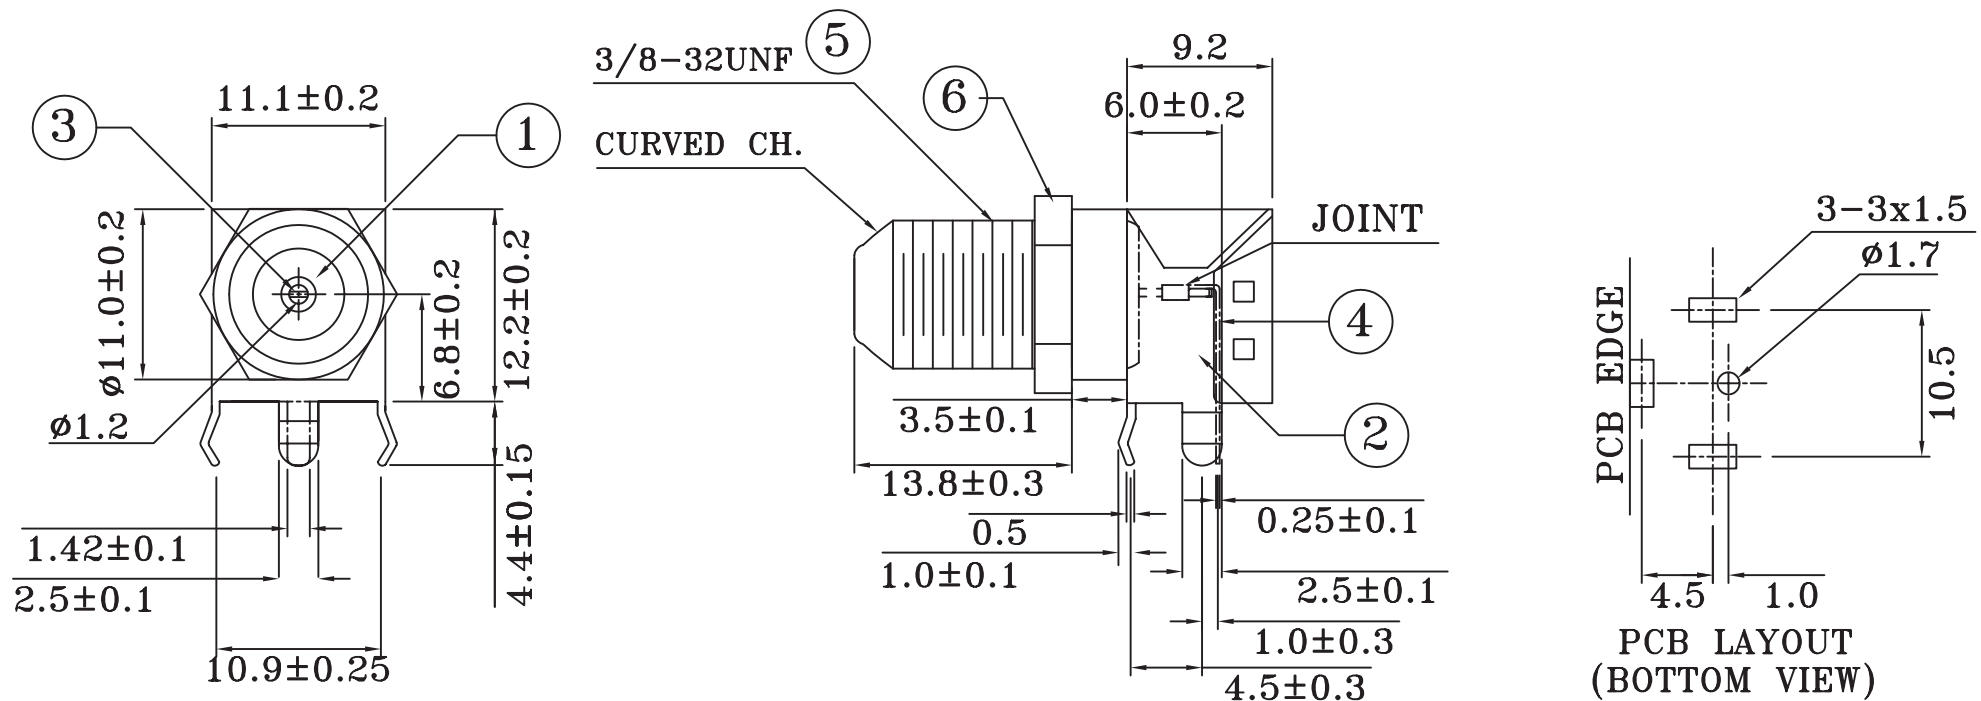

NO.	NAME	MATERIAL	FINISH	Q'TY
1	INSULATOR	P.P.GREEN(PANTONE #802C, $\Delta E = \pm 3$)UL 94HB	NATURAL	1
2	BRACKET	C.R.S 0.41mm	TIN PLATED	1
3	CENTER PIN	PHOS. BRONZE	TIN PLATED	1
4	TERMINAL	BRASS	TIN PLATED	1
5	BODY	BRASS	NICKEL PLATED	1
6	NUT	STEEL	NICKEL PLATED	1

- 絕緣抵抗: DC 500V 500M Ω 以上
- 耐電壓: AC 1.2KV 1分間以下無異常
- 接觸抵抗: AC 1000V 20m Ω MAX.(使用測具 $0.8 \phi \pm 0.01$)
- 插入力.拔出力: 使用測具F QUICK MALE
插入力: 0.5Kg~3Kg
拔出力: 0.3Kg~3Kg
- FREQUENCY RANGE: 50MHz TO 850 MHz
- TIGHTEN HEX NUT DOWN TO 4.5 IN-LBS. ± 0.5 IN-LBS
- BODY TO BRACKET CLINCH MUST BE ABLE TO WITHSTAND 7.5 IN-LBS.OF TORQUE MIN
- THE INSULATOR MUST NOT DEFORM OR DISCOLOR WHEN EXPOSED TO TEMPERATURES OF 200 $^{\circ}$ C FOR 5 SECS.AND 170 $^{\circ}$ C FOR 30 SECS.
- 絕緣套管膠料採用UL認證的PP-GF30% 防火VO

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

照片框

ORDER INFORMATION

F-JRC-75-LF
SERIES
LEADFREE
75 OHM
CENTER
DIP 90°
JACK

DESCRIPTION: F-CONNECTOR