

PCB MOUNTING HOLE (印刷电路板架設孔)

ELECTRICAL:

Operation Voltage: 250 VAC Max.


Frequency Range : 0~1 GHz

Impedance: 75 Ohm

VSWR: 1.35 Max.

Temperature: -40°C to +140°C

3/8-32UNEF-2A

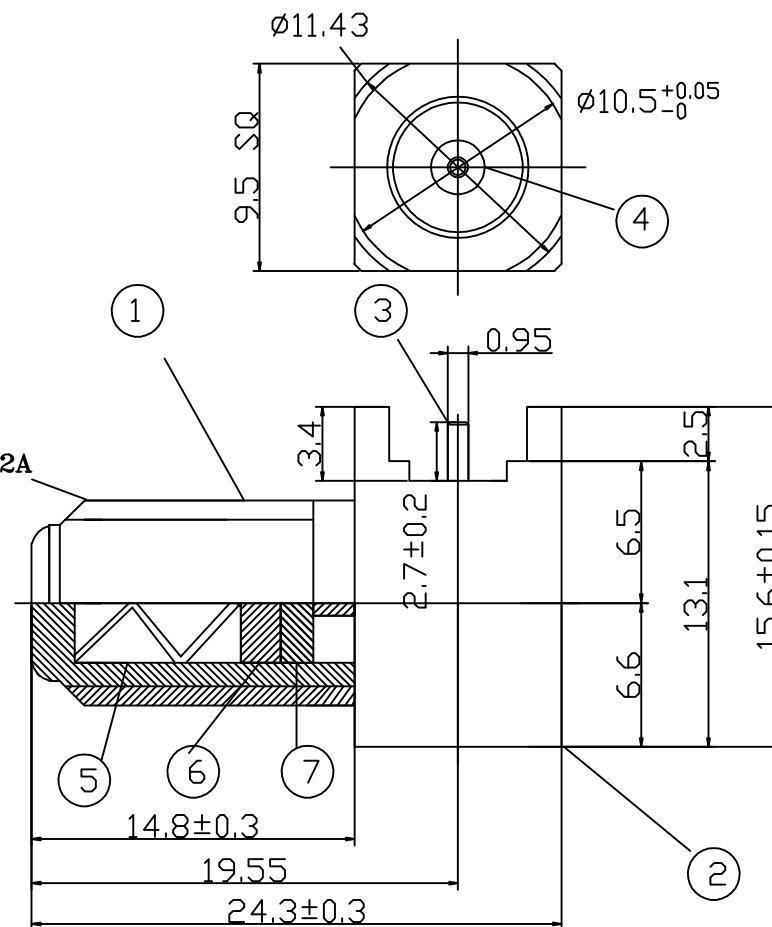

7	INSULATOR	POM	CLEAR	1
6	INSULATOR	POM	CLEAR	1
5	INSULATOR	P.P.	WHITE	1
4	INSULATOR	POM	WHITE	1
3	PIN	BRASS	TIN	1
2	BODY	BRASS	NICKEL	1
1	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

ANGLES = 3°
UP TO 6 = ±0.1
6-40 = ±0.2
40-120 = ±0.6
120-315 = ±1.0
ABOVE 315 = ±1.6

照片框

ORDER INFORMATION

F-JRL24SF-75-LF
SERIES
LEADFREE
75 OHM
BOTH FLAT
LONG 24.3mm
DIP 90°
JACK

DESCRIPTION: R/A F (F) P.C.B. 24.3L

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com