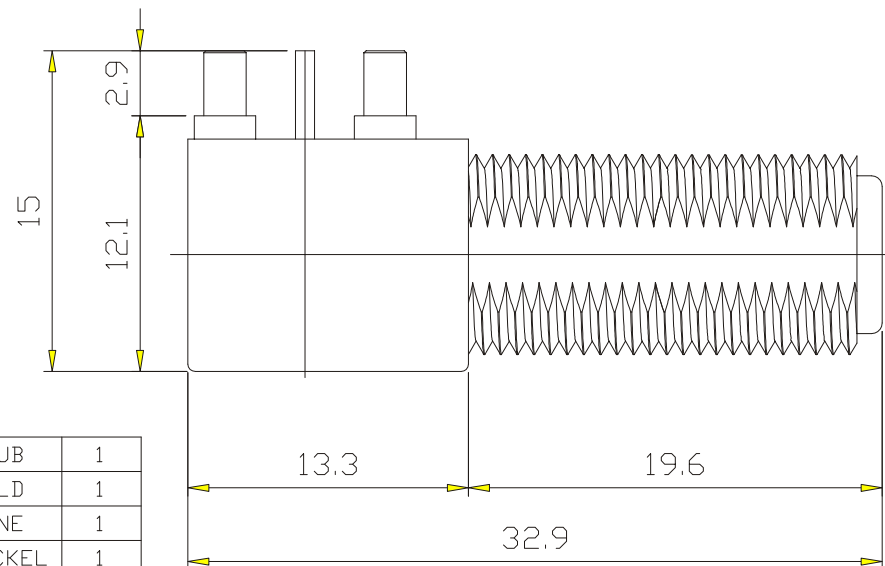
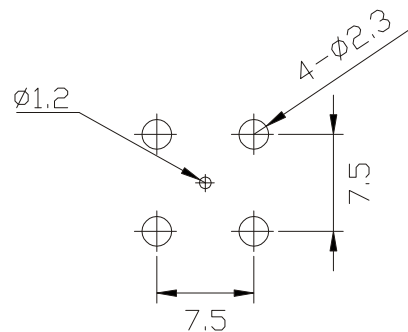
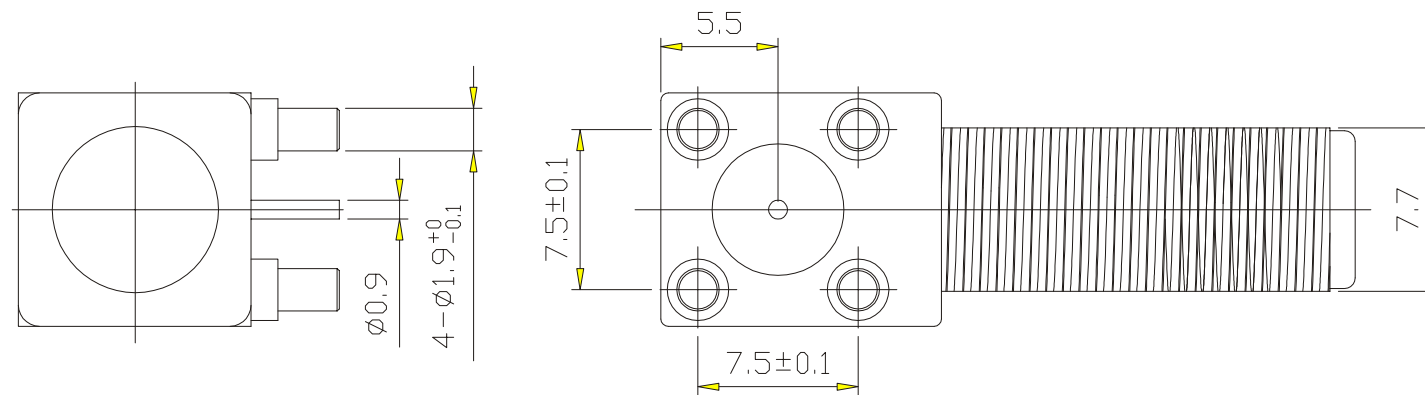


9	INSULATOR	NYLON66+30%G.F	BLUB	1
8	PIN(FEMALE)	BeCu	GOLD	1
7	INSULATOR	DELIN	NONE	1
6	BODY	BRASS	NICKEL	1
5	PIN(MALE)	BRONZE	GOLD	1
4	INSULATOR	TEFLON	NONE	1
3	PIN-2	BRASS	TIN	1
2	INSULATOR	DELIN	NONE	1
1	CAP	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG ±

照片框

ORDER INFORMATION

F-JRL32SF-75-LF
SERIES
LEADFREE
75 OHM
BOTH FLAT
LONG 32.5mm
DIP 90°
JACK

DESCRIPTION: RIGHT ANGLE F FEMALE P.C MOUNT