

1. MATERIAL

- 1.1 INSULATOR:PTFE、PA9T/NATURE.
- 1.2 ASSEM.BODY:ZIN.
- 1.3 PIN:BERYLLIUM COPPER/BRASS.
- 1.4 PLASTIC RING:PA9T/NATURE.

2. FINISH

- 2.1 PIN :SEE TABLE.
- 2.2 ASSEM.BODY:SEE TABLE.

3.ELECTRICAL CHARACTERISTICS







- 3.1 WORKING VOLTAGE: AC 170V.
- 3.2 WITHSTAND VOLTAGE:500V,
50Hz,rms.
- 3.3 INSULATION RESISTANCE:
1,000M OHM MIN.
- 3.4 IMPEDENCE:75 OHM.

4.ENVIRONMENTAL

- 4.1 WORKING TEMPERATURE:
-55°C~+155°C.
- 4.2 RELATIVE HUMIDITY:
MAX 95%(40°C±2°C)

5.MECHANICAL CHARACTERISTICS

- 5.1 MATING FORCE:20N MAX.
- 5.2 UNMATING FORCE:0.3N MIN.
- 5.3 TEST SEQUENCE AND THE TEST
PIN DIAMETER(FOR EN61169-24).

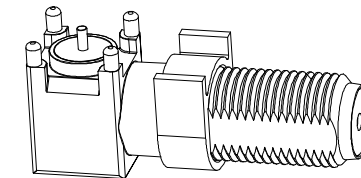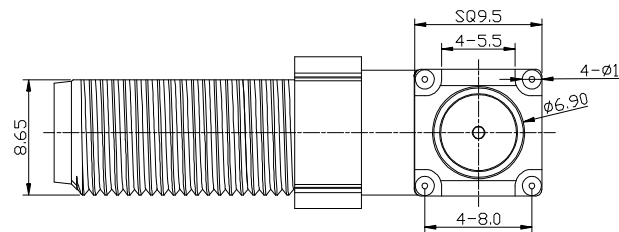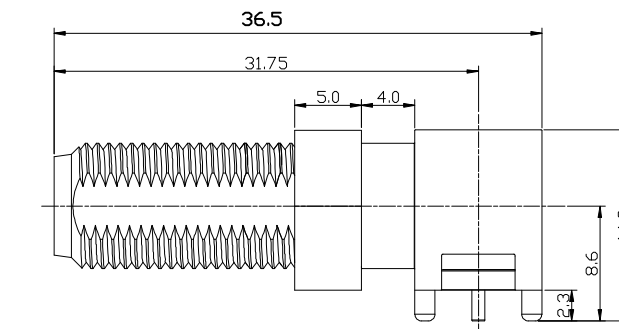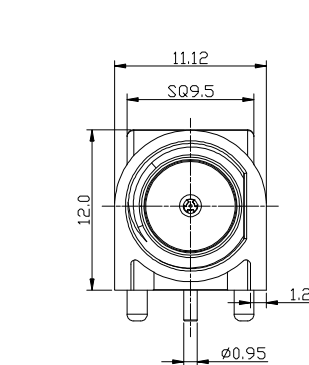

4	DIELECTRIC	PA9T	NONE	1
3	PIN	BRASS	TIN	1
2	DIELECTRIC	PA9T	NONE	1
1	BODY	ZIN	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0.5-5	±0.2
5-30	±0.4
30-120	±0.6
120-315	±1
315-1000	±1.6
1000-2000	±2.4

照片框

ORDER INFORMATION

F-JRL36RF-75-LF
SERIES JACK
LEADFREE
75 OHM
ROUND FLAT
LONG 36.5mm
DIP 90°

DESCRIPTION: F female R/A pcb mount 75ohm