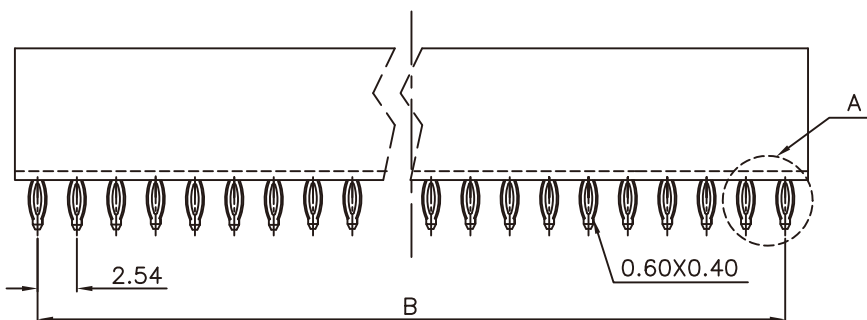
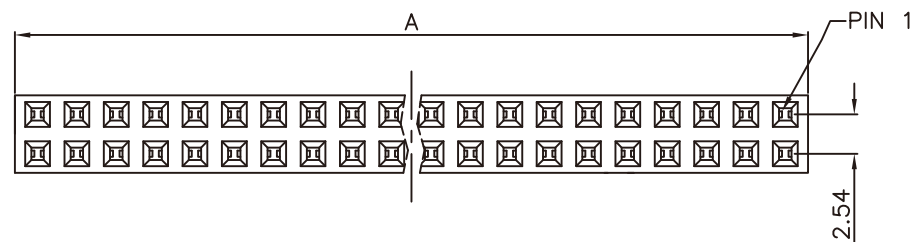


Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0

Contacts: Copper Alloy

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V for 1 minute

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+105°C .

*RoHS Compliant

Insertion Depth: 2.55mm to 6.20mm.



Press Fit Type

Detail A

Position Dimension	4 Thru 80
A	2.54 X No. of Position /2+0.4
B	2.54 X No. of Position /2-2.54

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-P085032-2Xxx-LF

SERIES
LEADFREE
2X02:04WAY
2X40:80WAY
DIP 3.2mm
HIGH 8.5mm
PRESS FIT

DESCRIPTION: