




Recommended P.C. Board Hole Layout



Specifications

Current Rating : 3 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 600V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0 P.B.T.
 Contact Plated : See Option
 Standard: Full Gold Flash

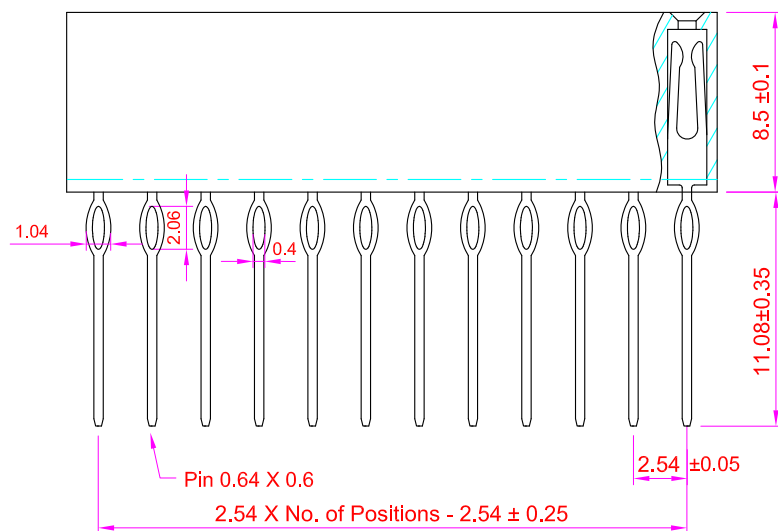

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ±

PPOJECTION

ORDER INFORMATION

F-P085110-1Xxx-LF
 SERIES | | | LEADFREE
 | | | 1X02:02WAY
 | | | 1X40:40WAY
 | | | DIP 11.0mm
 | | | HIGH 8.5mm
 | | | PRESS FIT

DESCRIPTION: Female Header P2.54 X 2.54mm Profile : 8.5mm, Single Row, Press Fit