
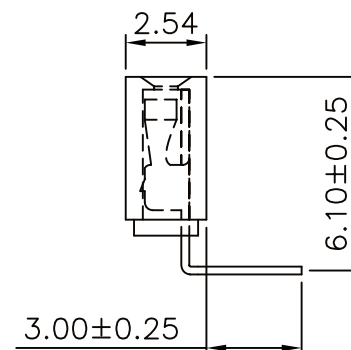
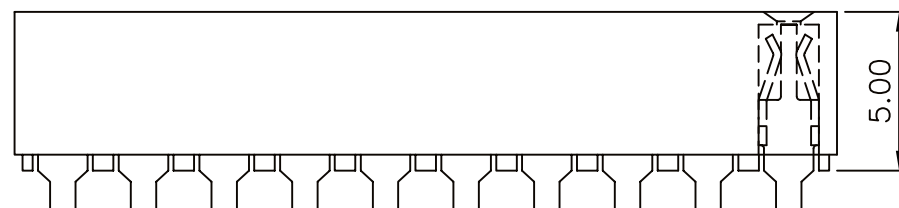


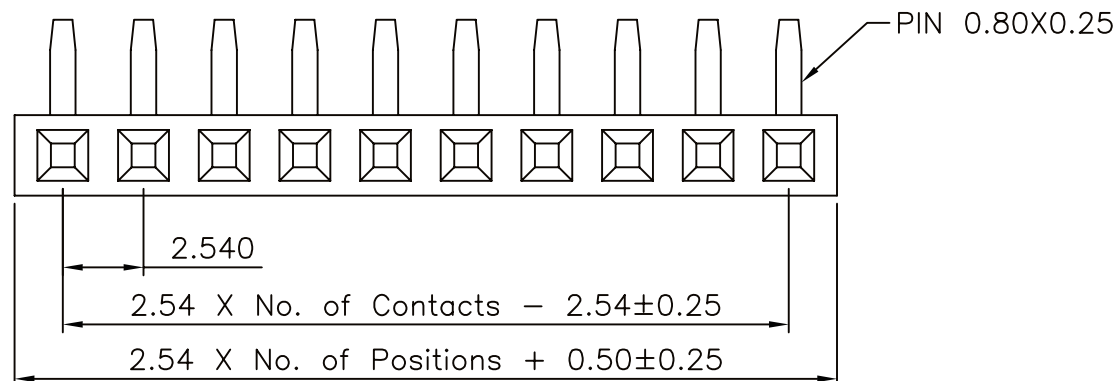

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0


All materials must be GP materials

注: 02~24PIN塑膠材質用P.B.T料生產,

25~40PIN塑膠材質用PA6T+20%料生產.

Recommended P.C.Board

Hole Layout



MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

X. ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

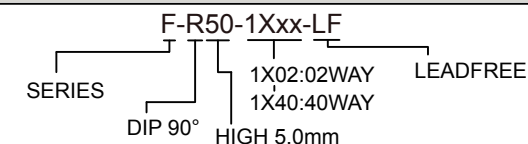

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW DIP TYPE BASE 5.00H