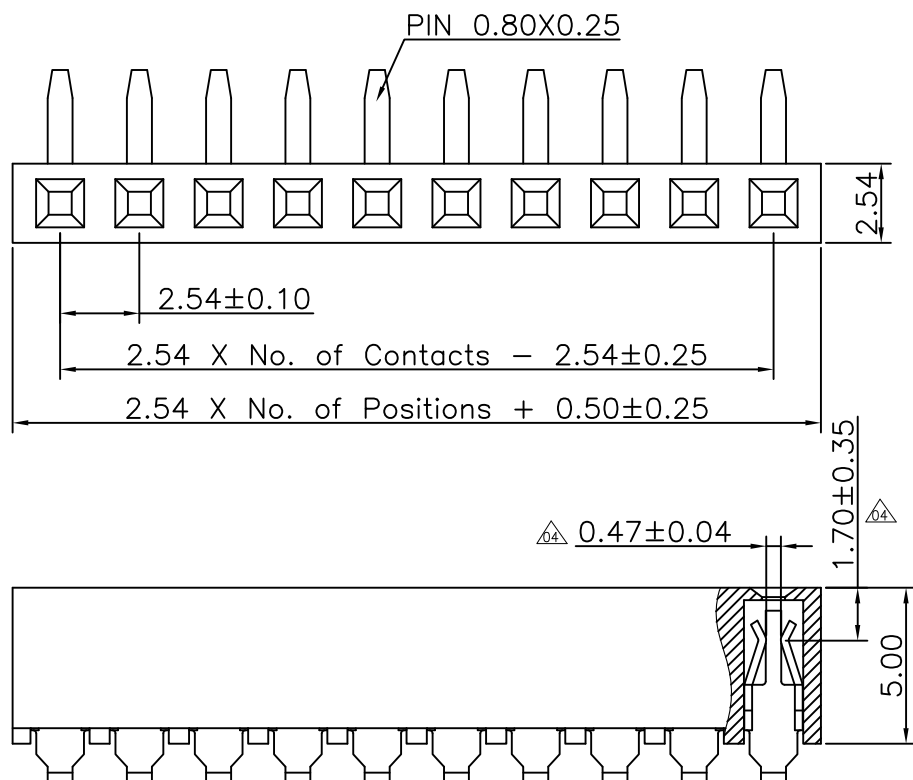


Specifications

Current Rating:3Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:600VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C

Materials


Contact Material:Phosphor Bronze

Insulator Material:Thermoplastic, UL 94V-0

PBT or the equivalent material

Recommended P.C.Board Layout

(Tolerance:±0.05)



MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-R50S30-1Xxx-LF

SERIES
LEADFREE
1X02:02WAY
1X40:40WAY
SEMI GOLD 30u"
HIGH 5.0mm
DIP 90°

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW R/A TYPE BASE 5.00H