
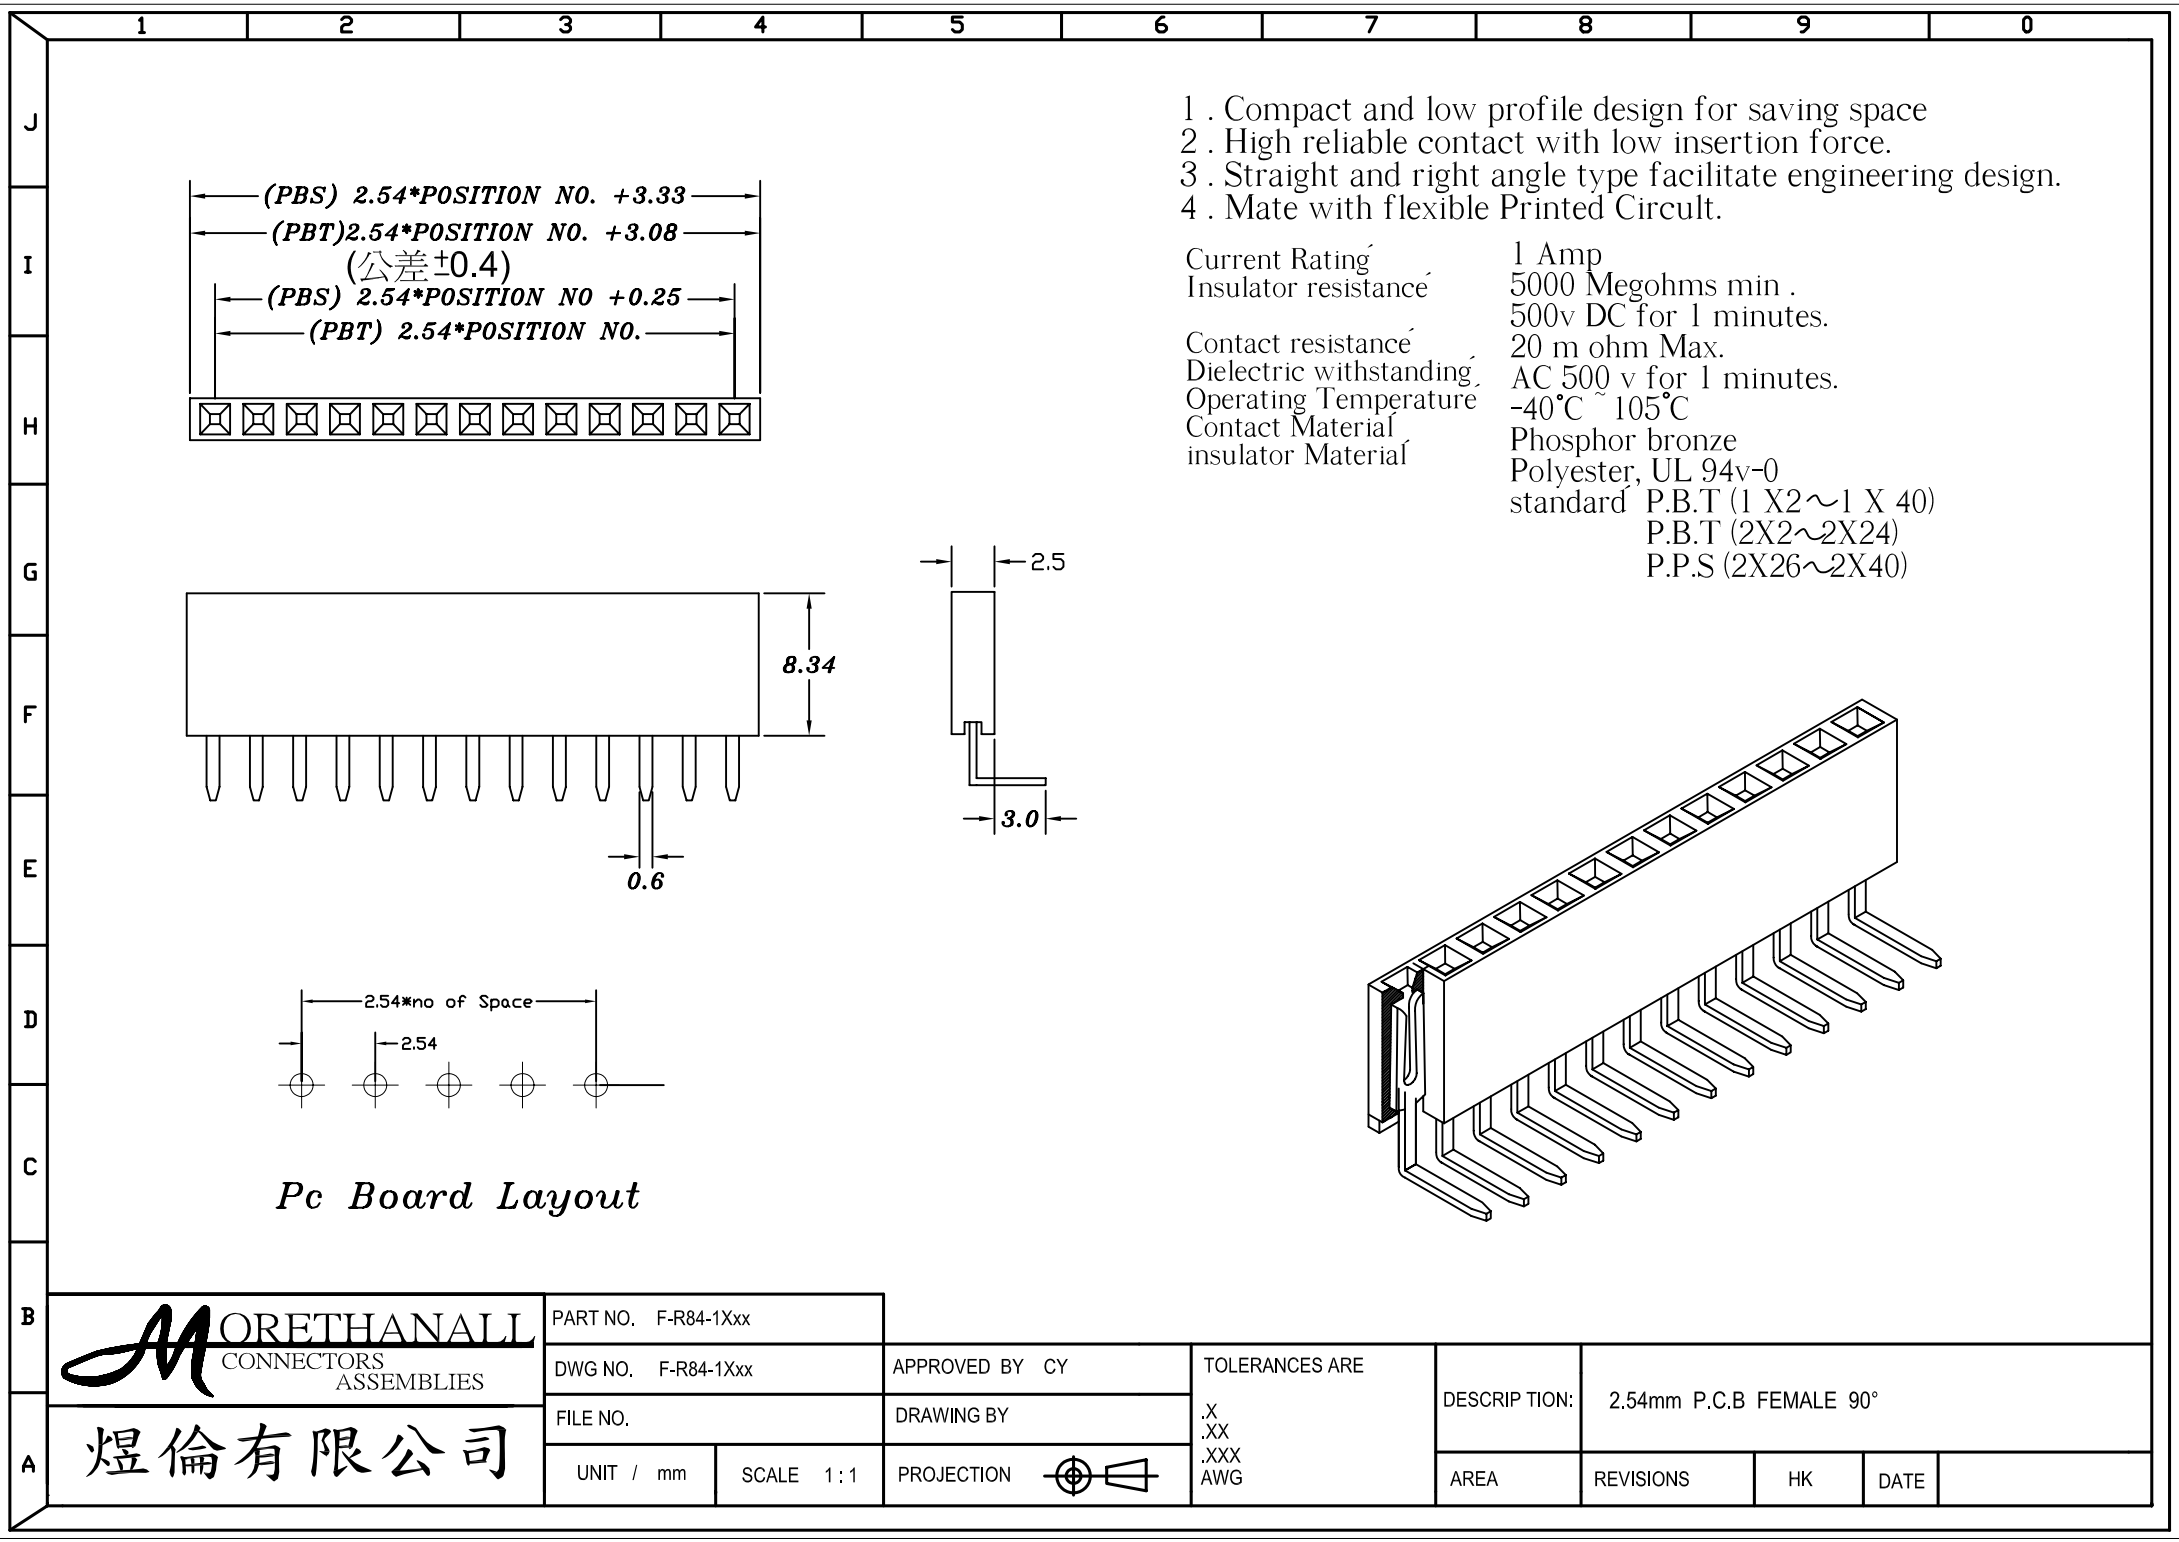




- 1 . Compact and low profile design for saving space
- 2 . High reliable contact with low insertion force.
- 3 . Straight and right angle type facilitate engineering design.
- 4 . Mate with flexible Printed Circuit.

Current Rating 1 Amp
Insulator resistance 5000 Megohms min .
500v DC for 1 minutes.
Contact resistance 20 m ohm Max.
Dielectric withstanding AC 500 v for 1 minutes.
Operating Temperature -40°C ~ 105°C
Contact Material Phosphor bronze
insulator Material Polyester, UL 94v-0
standard P.B.T (1 X2~1 X 40)
P.B.T (2X2~2X24)
P.P.S (2X26~2X40)

Pc Board Layout

MORETHANALL CONNECTORS ASSEMBLIES		PART NO. F-R84-1Xxx										
		DWG NO. F-R84-1Xxx		APPROVED BY CY		TOLERANCES ARE .X .XX .XXX AWG		DESCRIP TION: 2.54mm P.C.B FEMALE 90°				
煜倫有限公司		FILE NO.		DRAWING BY								
		UNIT / mm	SCALE 1:1	PROJECTION 		AREA		REVISIONS		HK	DATE	