
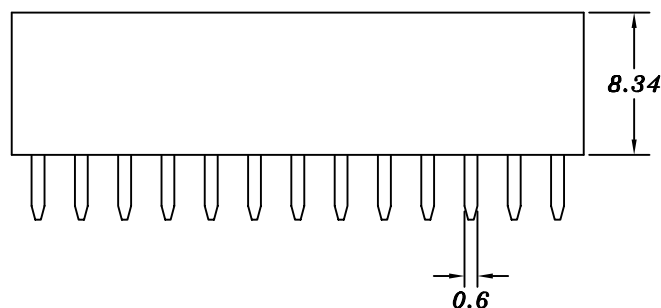
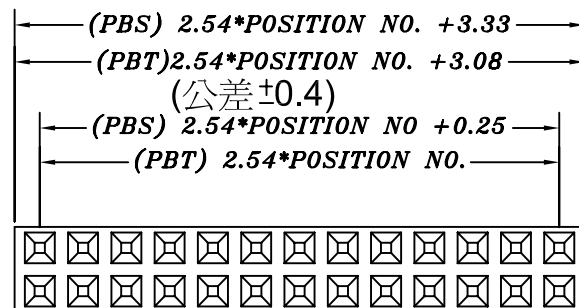
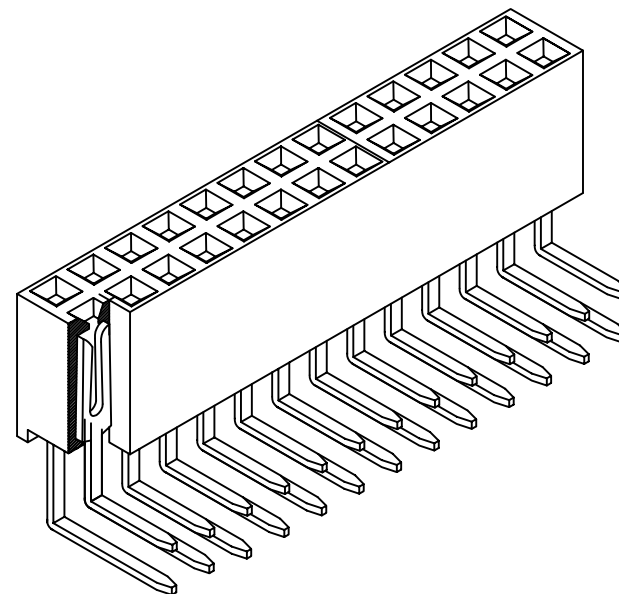


Pc Board Layout

1. Compact and low profile design for saving space
2. High reliable contact with low insertion force.
3. Straight and right angle type facilitate engineering design.
4. Mate with flexible Printed Circuit.

Current Rating 1 Amp
 Insulator resistance 5000 Megohms min.
 500v DC for 1 minutes.
 Contact resistance 20 m ohm Max.
 Dielectric withstanding AC 500 v for 1 minutes.
 Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
 Contact Material Phosphor bronze
 insulator Material Polyester, UL 94v-0
 standard P.B.T (1 X2~1 X 40)
 P.B.T (2X2~2X24)
 P.P.S (2X26~2X40)

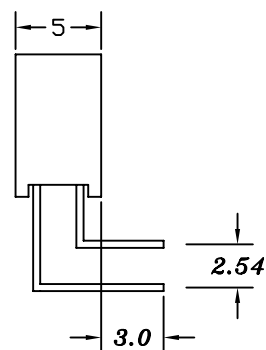

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫有限公司

PART NO. F-R84-2Xxx

DWG NO. F-R84-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X
 .XX
 .XXX
 AWG

DESCRIP TION: 2.54mm P.C.B FEMALE 90°

AREA

REVISIONS

HK

DATE