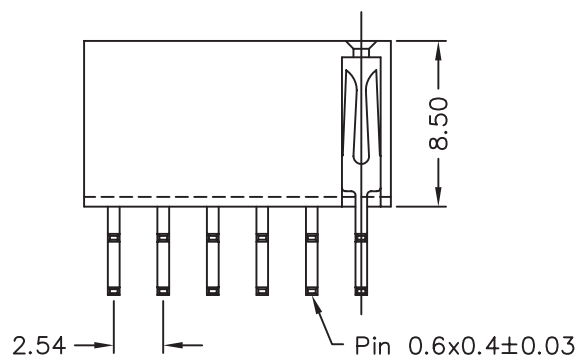
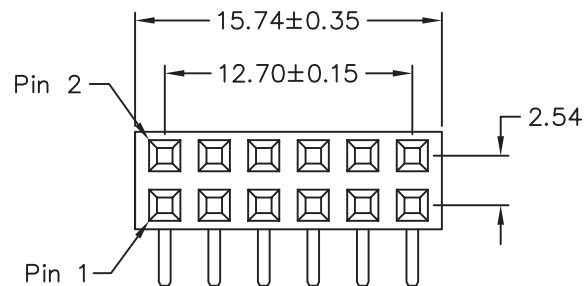


Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

SPECIFICATION


Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

F-RS30-2X06-LF
LEADFREE
S30:SEMI/GOLD/30u"
RoHS Compliant

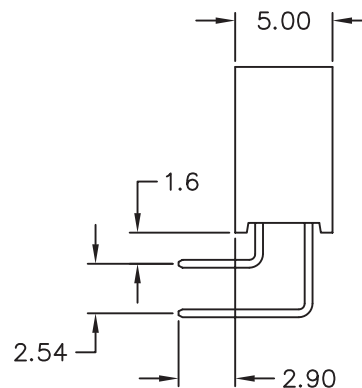

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. F-RS30-2X06

DWG NO. F-RS30-2X06

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

FEMALE HEADER 2.54*2.54mm
RIGHT ANGLE TYPE, DUAL ROWS
HEIGHT 8.5mm

AREA

REVISIONS

HK

DATE

煜倫股份有限公司