
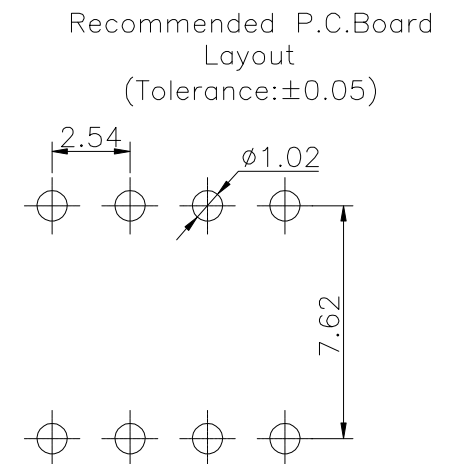
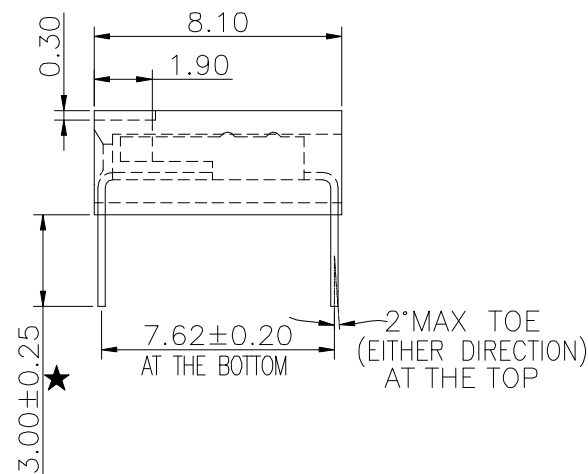
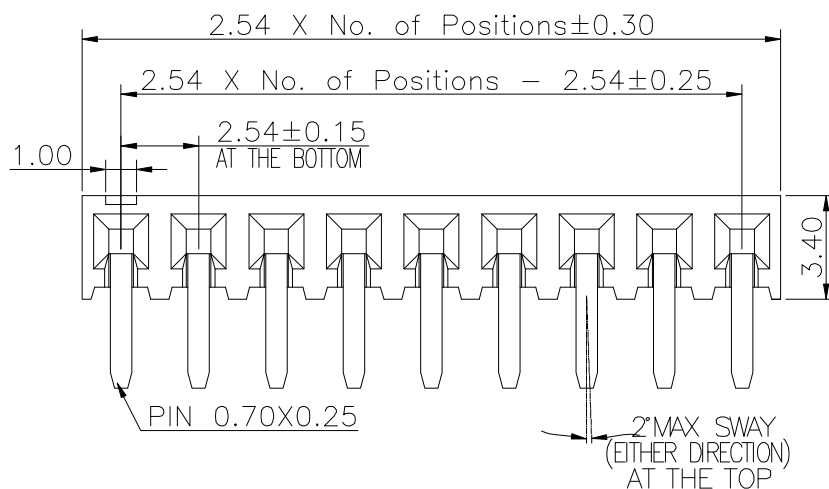


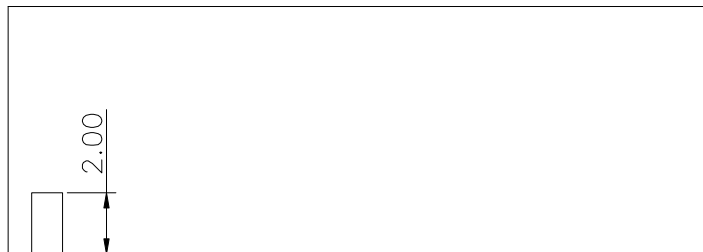

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩMin.

Dielectric Withstanding Voltage: 600VAC

Contact Resistance: 20mΩMax.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulator Material: High Temperature

Thermoplastic, UL 94V-0 Nylon (Halogen

Free) or the equivalent material

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±



ORDER INFORMATION

F-S-1Xxx-LF
SERIES | LEADFREE
1X02:02WAY
1X40:40WAY
SIDE ENTRY

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW DIP TYPE SIDE ENTRY