



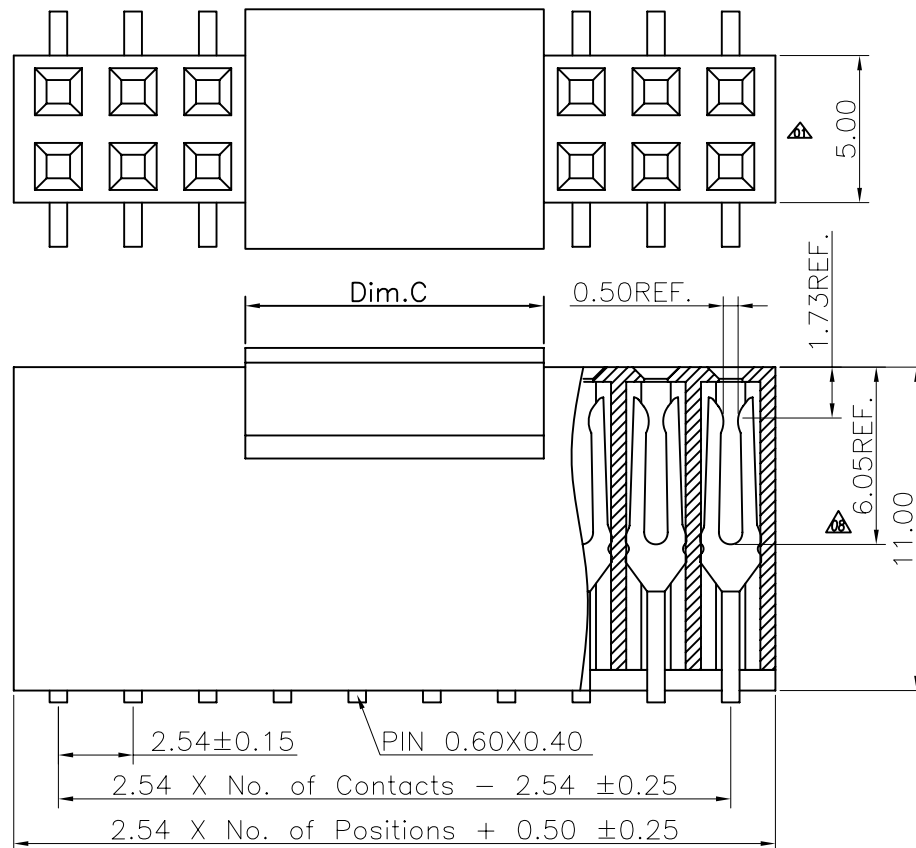

F-V114XC-2Xxx-LF
LEADFREE
2X02:04WAY
2X40:80WAY

RoHS Compliant

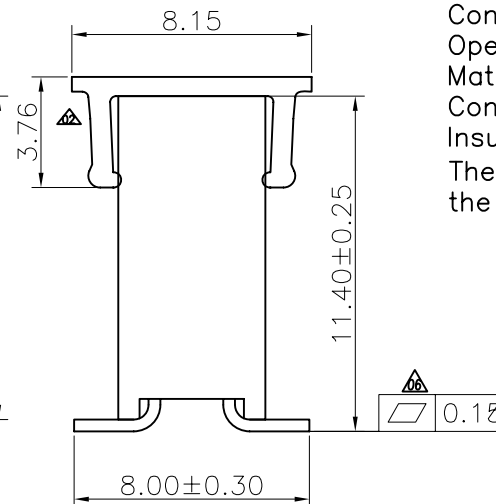

Specifications

Current Rating:3Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:600VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C


Materials

Contact Material:Phosphor Bronze

Insulator Material:High Temperature

Thermoplastic, UL 94V-0 Nylon 6T or
the equivalent material

Recommended P.C.Board
Layout
(Tolerance:±0.05)

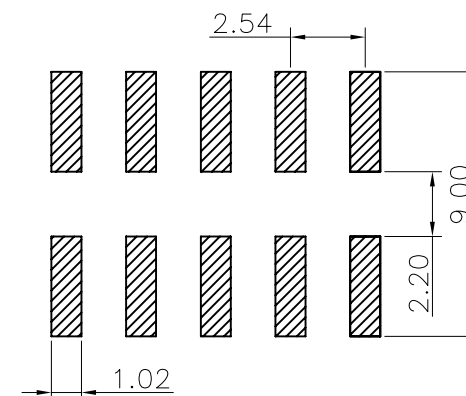

DIM.C	NOTE
4.00mm	02~03PIN
10.15mm	04~40PIN

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. F-V114XC-2Xxx

DWG NO. F-V114XC-2Xxx

FILE NO.

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE
X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG

DESCRIPTION:

2.54 FEMALE HEADER
DUAL ROWS SMT TYPE BASE 11.00H

AREA

REVISIONS

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1