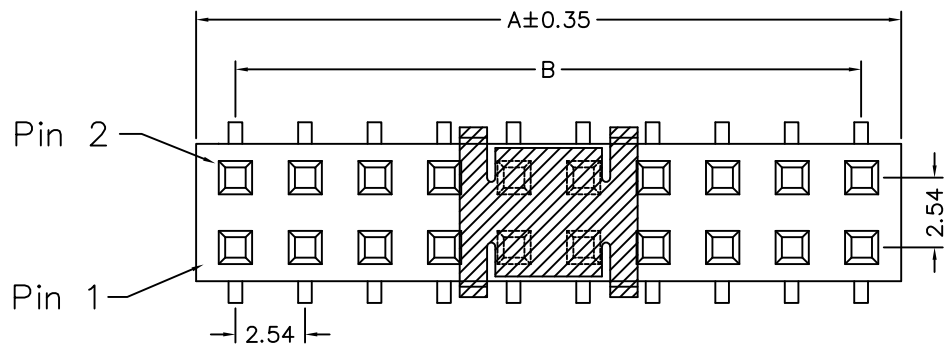


Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphor Bronze

SPECIFICATION


Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

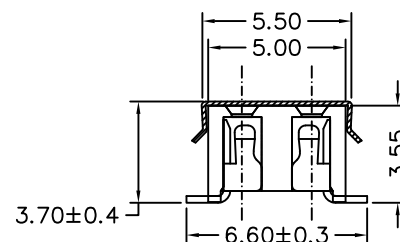

POLES	DIM A	DIM B	POLES	DIM A	DIM B
			21	53.74	50.80
2	5.08	2.54	22	56.28	53.34
3	7.62	5.08	23	58.82	55.88
4	10.16	7.62	24	61.36	58.42
5	13.10	10.16	25	63.90	60.96
6	15.64	12.70	26	66.44	63.50
7	18.18	15.24	27	68.98	66.04
8	20.72	17.78	28	71.52	68.58
9	23.26	20.32	29	74.06	71.12
10	25.80	22.86	30	76.60	73.66
11	28.34	25.40	31	79.14	76.20
12	30.88	27.94	32	81.68	78.74
13	33.42	30.48	33	84.22	81.28
14	35.96	33.02	34	86.76	83.82
15	38.50	35.56	35	89.30	86.36
16	41.04	38.10	36	91.84	88.90
17	43.58	40.64	37	94.38	91.44
18	46.12	43.18	38	96.92	93.98
19	48.66	45.72	39	99.46	96.52
20	51.20	48.26	40	102.00	99.06

2*5以下無肉厚, 2*5(含)以上有肉厚

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

F-V36XC-2Xxx-LF
SERIES 180°SMT LEADFREE
2X02:04WAY
2X40:80WAY
CAP
NON POST
HIGH 3.55mm

DESCRIPTION: FEMALE HEADER 2.54*2.54mm SMT TYPE, DUAL ROWS HEIGHT 3.5mm CAP