


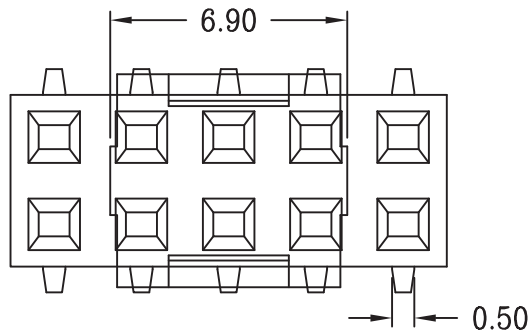




F-V37XC-2Xxx-LF
LEADFREE
RoHS Compliant

SPECIFICATIONS

CURRENT RATING: 3 AMP
INSULATION RESISTANCE: 1000M OHMS MIN.
DIELECTRIC WITHSTANDING: 600V AC/DC
CONTACT RESISTANCE: 20m OHMS MAX.
OPERATING TEMPERATURE: -40°C ~ +105°C

MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE
INSULATION MATERIAL: POLYESTER, UL 94V-0
NYLON 6T

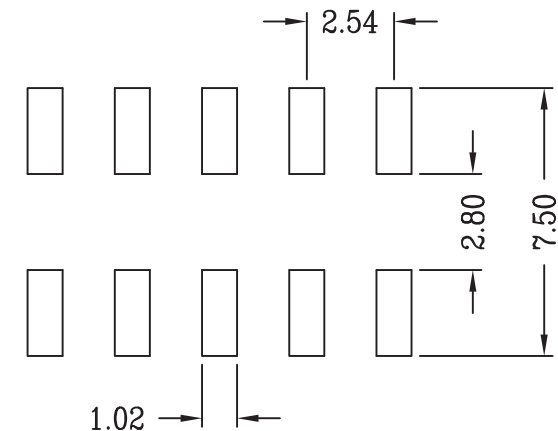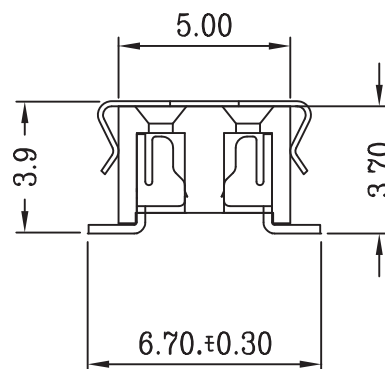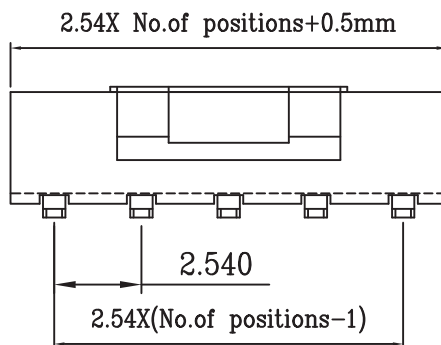

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

P PROJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

F-V37XC-2Xxx-LF

SERIES 180°SMT HIGH 3.7mm CAP NON POST

2X02:04WAY 2X40:80WAY LEADFREE

DESCRIPTION: 2.54mm Female Socket Dual Row SMD type (H=3.7)