
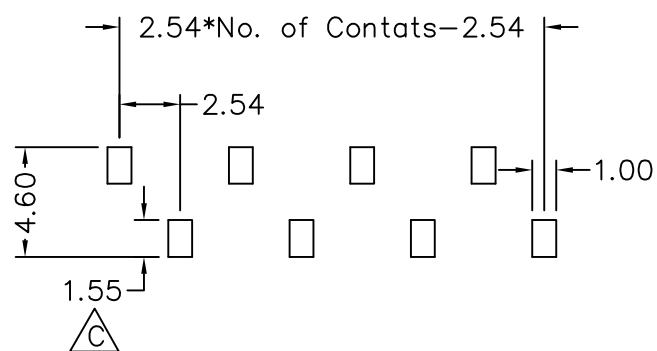

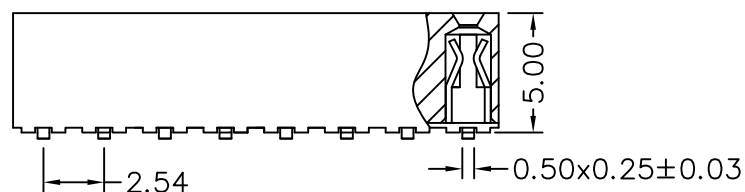


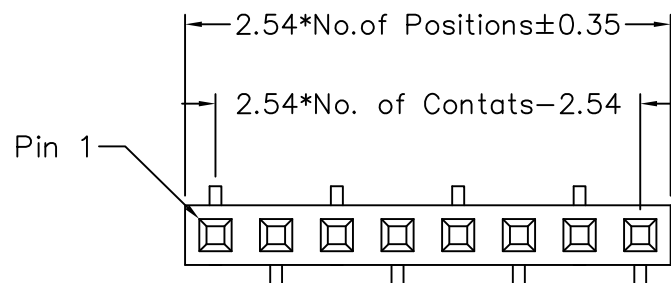

Recommended P.C.B Layout

MATERIAL
Contact Pin : Phosphar Bronze

SPECIFICATION
Current Rating : 3 AMP
Insulation Resistance : $5000M\Omega$ Min.
Contact Resistance : $20m\Omega$ Max.
Dielectric Withstanding : 600 VAC

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X ± 0.30
.XX ± 0.20
.XXX $\pm$
ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

F-V52X-1XxxR-LF
SERIES
180°SMT
LEADFREE
R TYPE FOOT
1X03:03 WAY
1X40:40 WAY
NON POST
HIGH 5.2mm

DESCRIPTION: FEMALE HEADER 2.54*2.54mm SMT TYPE, SINGLE ROW HEIGHT 5.0mm