
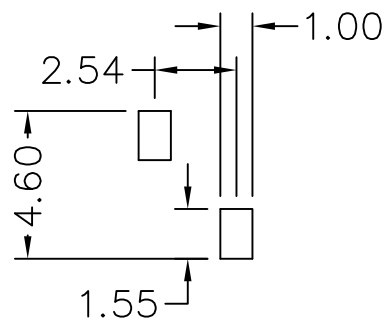
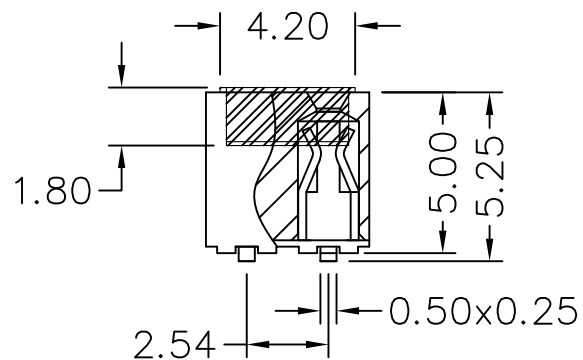


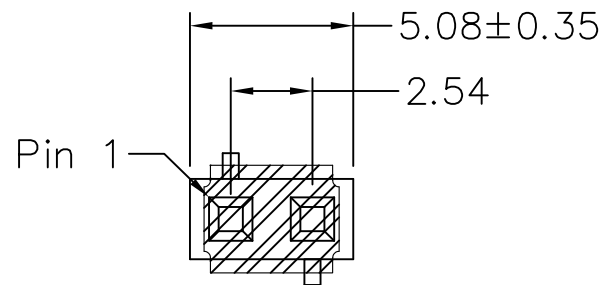

Recommended P.C.B Layout

## MATERIAL

Contact Pin : Phosphar Bronze

Insulator: NY6T UL94-V0

## SPECIFICATION


Current Rating : 3 AMP

Insulation Resistance : 500MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Withstanding : 600 VAC

Operating Temperature: -40°C to + 105°C

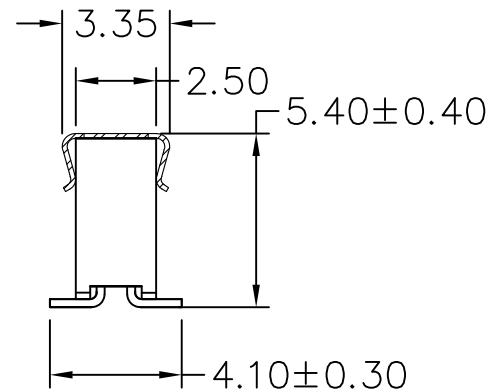

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ± 3°

照片框

## ORDER INFORMATION

F-V52XC-1X02R-LF  
SERIES T T T T T LEADFREE  
180°SMT CAP 02 WAY R TYPE FOOT  
NON POST  
HIGH 5.2mm

DESCRIPTION: FEMALE HEADER 2.54\*2.54mm SMT TYPE, SINGLE ROW HEIGHT 5.0mm, CAP+T/R