
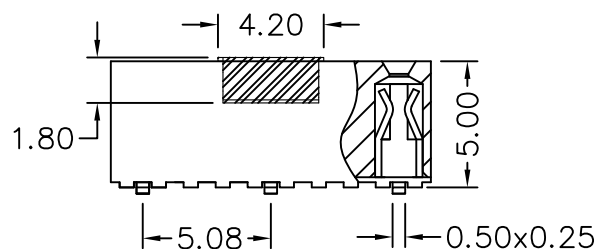
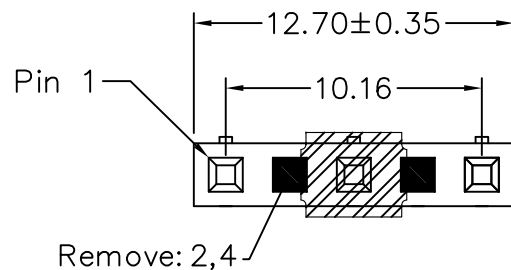


Recommended P.C.B Layout

MATERIAL

Insulator: NY6T UL94-V0

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 8 AMP PER PIN(20AWG)

Insulation Resistance : $500M\Omega$ Min.

Contact Resistance : $20m\Omega$ Max.

Dielectric Withstanding : 600 VAC

Operating Temperature: -40°C to $+105^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.30
.XX ± 0.20
.XXX $\pm$
ANG $\pm 3^{\circ}$

照片框

ORDER INFORMATION

F-V52XC-1X05REE-LF
SERIES
180°SMT
HIGH 5.2mm
CAP
NON POST
05 WAY
R TYPE FOOT
EMPTY EVEN PIN
LEADFREE

DESCRIPTION: FEMALE HEADER 2.54*2.54mm SMT TYPE, SINGLE ROW HEIGHT 5.0mm CAP+T/R