
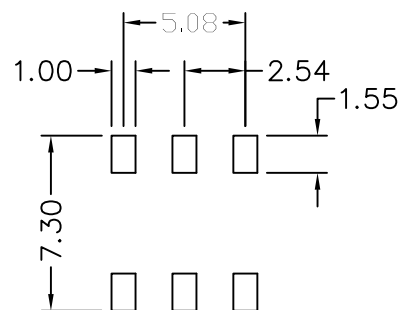
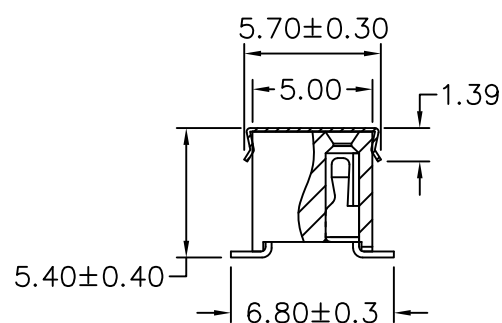
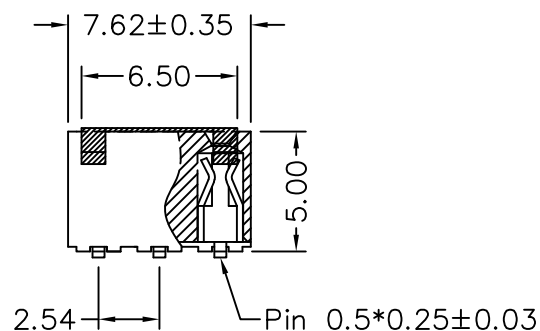


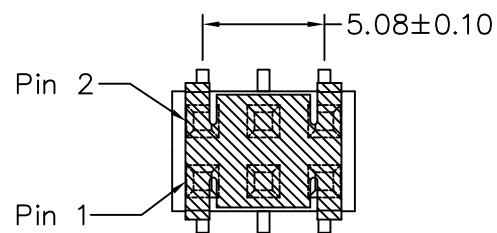

Recommended P.C.B Layout

MATERIAL

Insulator : NY10T UL94-V0

Contact Pin : Phosphar Bronze

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

F-V52XC-2X03-LF
SERIES | CAP | 06 WAY | LEADFREE
NON POST
HIGH 5.2mm
180°SMT

DESCRIPTION: FEMALE HEADER 2.54*2.54mm SMT TYPE, DUAL ROWS HEIGHT 5.0mm,CAP+TAPE