
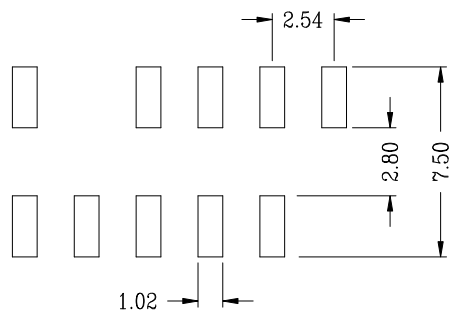

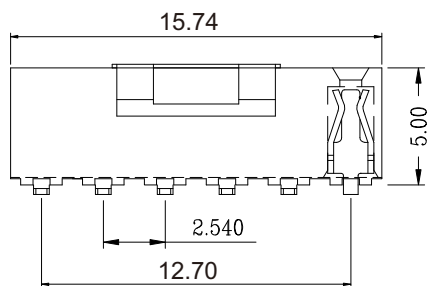


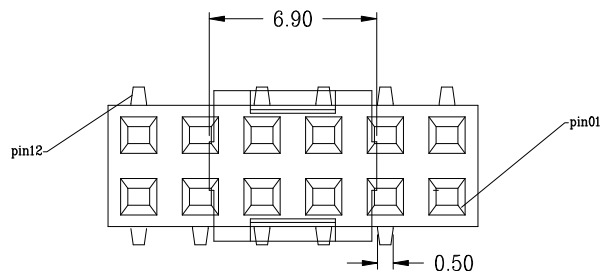

RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING: 600V AC/DC

CONTACT RESISTANCE: 20m OHMS MAX.

OPERATING TEMPERATURE: -40°C ~ +105°C

MATERIALS

CONTACT MATERIAL: PHOSPHOR BRONZE

INSULATION MATERIAL: POLYESTER, UL 94V-0
NYLON 6T

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.35

.XX ± 0.25

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-V52XC-2X06E110-LF

SERIES 180°SMT
CAP 12WAY
NON POST
HIGH 5.2mm
LEADFREE
EMPTY#1.10

DESCRIPTION: 2.54mm Female Socket Dual Row SMD type (H=5.2)