

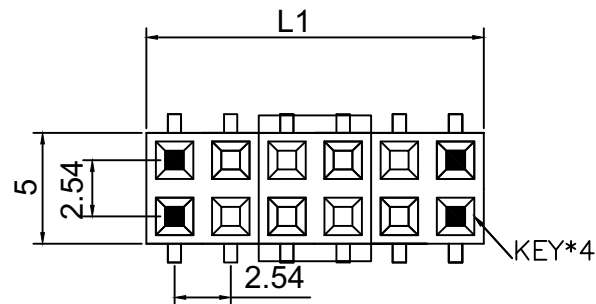




$$L1 = 2.54 * (\text{No. of pin} / 2)$$


$$L2 = 2.54 * (\text{No. of pin} / 2 - 1)$$

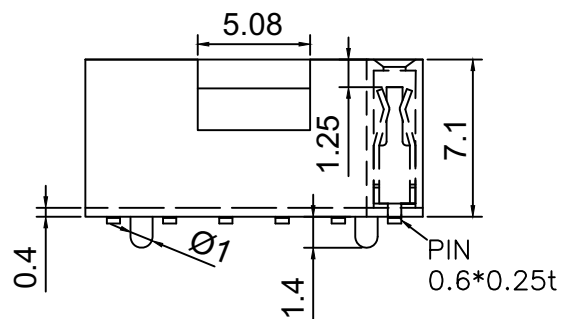

specifications

current rating:3amp
 voltage rating:250V ac max
 insulator resistance:5000 M ohms min.
 contact resistance:20 m ohms max.
 dielectric withstanding:500v ac for one minute
 operating temperature:-40°c--+105°c(ny9t)
 max.processing temp:245±5°c for 3-5seconds(ny9t)

contact material:phosphor bronze
 insulator material:ny9t
 color:black
 finish:gold flash
 packing:bag/tray

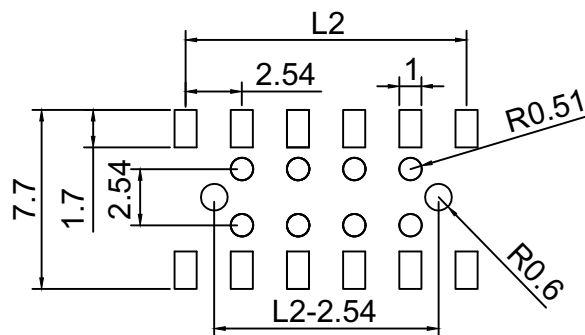

RECOMMENDED P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.35
 .XX ± 0.25
 .XXX ± 0.15
 ANG ±

照片框

ORDER INFORMATION

F-V75PC-2X06K4C-LF
 SERIES LEADFREE
 180°SMT CAP POST HIGH 7.5mm
 12 WAY
 KEY#4

DESCRIPTION: 2.54mm Female Header, dual rows, SMT Type