

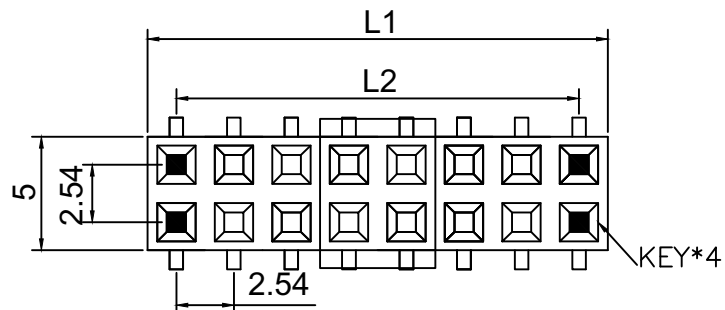


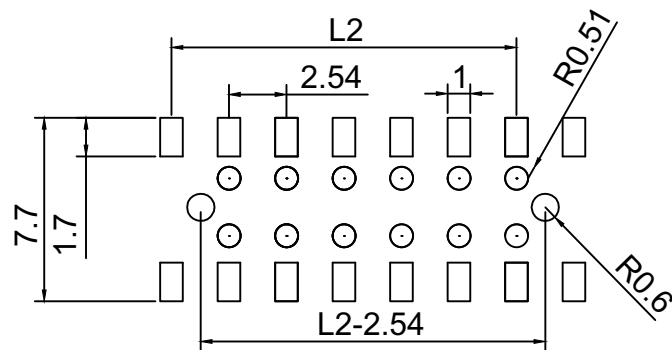

$$L1 = 2.54 * (\text{No. of pin} / 2)$$

$$L2 = 2.54 * (\text{No. of pin} / 2 - 1)$$

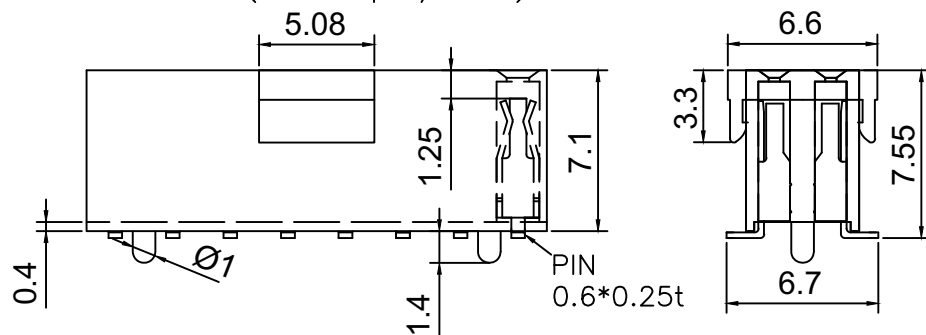

RECOMMENDED P.C.B. LAYOUT

specifications

current rating:3amp
voltage rating:250V ac max
insulator resistance:5000 M ohms min.
contact resistance:20 m ohms max.
dielectric withstanding:500v ac for one minute
operating temperature:−40°c--+105°c(ny9t)
max.processing temp:245±5°c for 3–5seconds(ny9t)

contact material:phosphor bronze
insulator material:ny9t
color:black
finish:gold flash
packing:bag/tray

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

F-V75PC-2XxxK4C-LF
SERIES
180°SMT
HIGH 7.5mm
CAP
POST
LEADFREE
KEY#4 PIN
2X03:06 WAY
2X40:80 WAY

DESCRIPTION: 2.54mm Female Header, dual rows, SMT Type